


Straight Run Mini Hinge

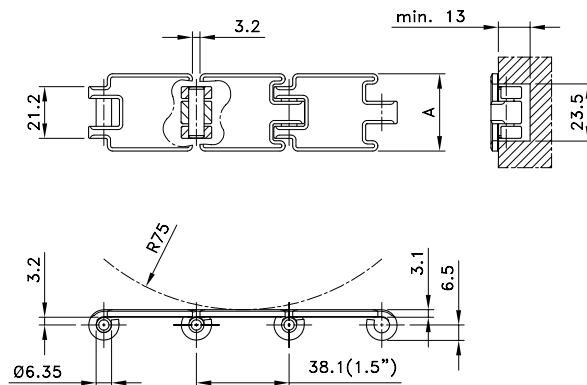


Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch	kg/m	mm		N
60-Series							
60 S 11*	762.50.11	31.8	1.25	1.07	0.18	no	2500
60 S 13**	762.50.13	44.5	1.75	1.35	0.18	no	
66-Series							
66 S 11 XHB*	762.00.11	31.8	1.25	1.07	0.18	no	2500
66 S 13 XHB**	762.00.13	44.5	1.75	1.35	0.18	no	
Opti-Plus							
SSR 812-K125	10.010.21.01	31.8	1.25	1.07	0.18	no	2500
SSR 812-K175	10.010.21.02	44.5	1.75	1.35	0.18	no	
Carbon Steel							
SR 810-K125	10.010.73.01	31.8	1.25	1.07	0.40	no	3250
SR 810-K175	10.010.73.02	44.5	1.75	1.35	0.40	no	

* Packaging: three strands of 3.048 m - 10 feet (3 x 80 links) per box.

** Packaging: two strands of 3.048 m - 10 feet (2 x 80 links) per box.

Straight Run Single Hinge Max-Line 1"

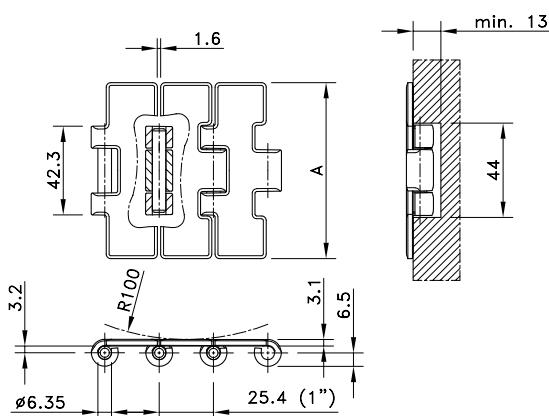

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		mm	inch	kg/m	mm		N
Opti-Plus							
SSC 512-K217	10.011.61.04	55.1	2.17	2.29	0.18	no	5000
SSC 512-K236	10.011.61.07	59.9	2.36	2.41	0.18	no	
SSC 512-K250	10.011.61.05	63.5	2.50	2.49	0.18	no	
SSC 512-K283	10.011.61.09	71.9	2.83	2.65	0.18	no	
SSC 512-K325	10.011.61.11	82.5	3.25	2.86	0.18	no	
SSC 512-K350	10.011.61.12	88.9	3.50	3.01	0.18	no	
SSC 512-K400	10.011.61.13	101.6	4.00	3.26	0.25	no	

Standard length: 3.048 m - 10 feet (120 links).