
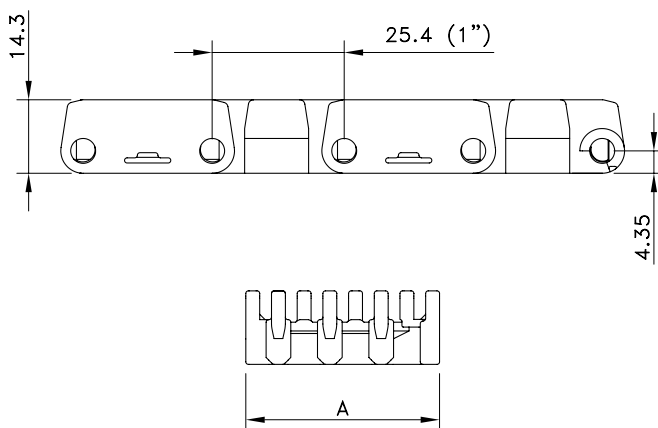




Raised Rib 1000 Narrow

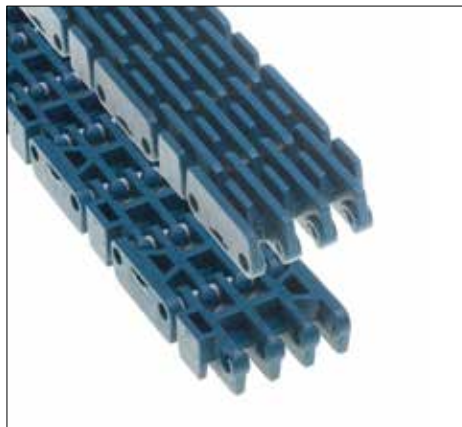

Assembly	Belt Type	Code Number	Width A	Temperature range °C		Working Load (max.)	Weight	Backflex Radius (min.)
			mm	Dry	Wet	N/m (21°C)	kg/m²	mm
XLG-Acetal with PBT Pins								
Standard	RR 1000-28 XLG	871.01.03	28	-30 to +80	up to 65	400	0.35	50
	RR 1000-38 XLG	871.01.00	38	-30 to +80	up to 65	400	0.39	
	RR 1000-48 XLG	871.01.01	48	-30 to +80	up to 65	600	0.48	
	RR 1000-58 XLG	871.01.02	58	-30 to +80	up to 65	800	0.59	

Standard length: 6.096 m - 20 feet.


Raised Rib 1000 Railtrack Narrow

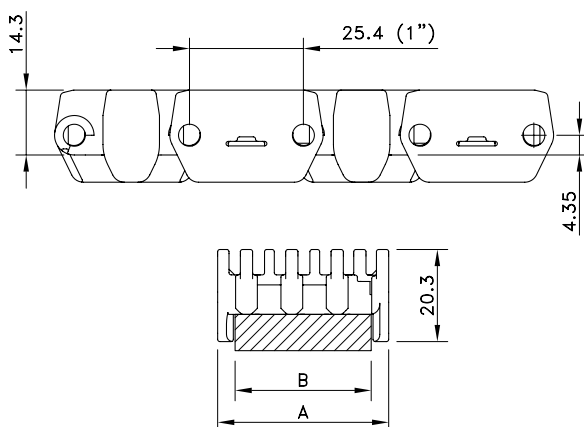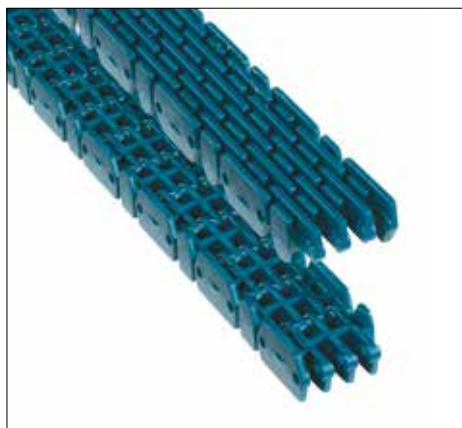

Assembly	Belt Type	Code Number	Width A	Temperature range °C		Working Load (max.)	Weight	Backflex Radius (min.)
			mm	Dry	Wet	N/m (21°C)	kg/m²	mm
XLG-Acetal with PBT Pins								
Standard	RRR 1000-28 XLG	871.00.03	28	-30 to +80	up to 65	200	0.33	50
	RRR 1000-38 XLG	871.00.00	38	-30 to +80	up to 65	400	0.43	
	RRR 1000-48 XLG	871.00.01	48	-30 to +80	up to 65	600	0.53	
	RRR 1000-58 XLG	871.00.02	58	-30 to +80	up to 65	800	0.62	

Standard length: 6.096 m - 20 feet.

Fingerplates Raised Rib Narrow



Type	Code Number	Weight	Width W	Length
		kg	mm	mm
XLG-Acetal				
1000 XLG 114 x 23	817.12.13	0.01	23	114
1000 XLG 114 x 33	817.12.10	0.02	33	
1000 XLG 114 x 43	817.12.11	0.02	43	
1000 XLG 114 x 53	817.12.12	0.03	53	