

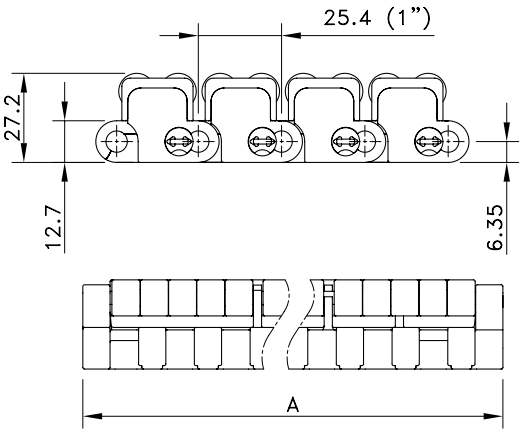


LBP 1005

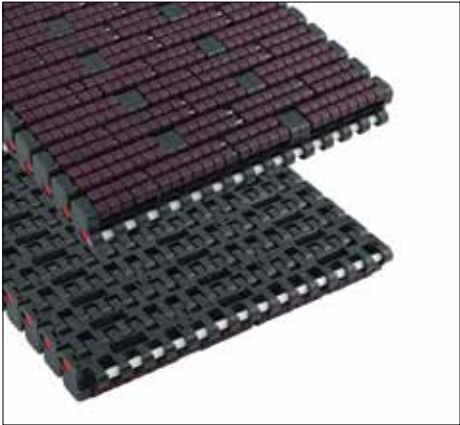

| Assembly                 | Belt Type       | Code Number* | Temperature range °C |         | Working Load (max.) | Weight | Backflex Radius (min.) |
|--------------------------|-----------------|--------------|----------------------|---------|---------------------|--------|------------------------|
|                          |                 |              | Dry                  | Wet     |                     |        |                        |
|                          |                 |              |                      |         | N/m (21°C)          | kg/m²  | mm                     |
| XLA-Acetal with PBT Pins |                 |              |                      |         |                     |        |                        |
| Standard                 | LBP 1005SR XLA  | 877.17.xx    | -40 to +80           | 1 to 65 | 35000               | 30     | 120                    |
| Double Positrack         | LBPD 1005SR XLA | 877.18.xx    |                      |         |                     |        |                        |

\* In code numbers xx corresponds with the belt width (A), starting with 11 for 170 mm, 12 for 255 mm and so on in steps of 85 mm up to 6120 mm. Other sizes upon request. See page 208 for all code numbers.

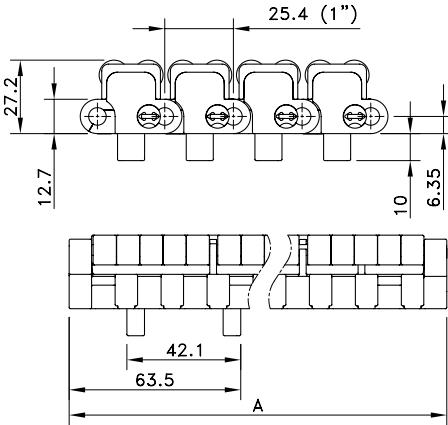

1005 Heavy duty LBP belt with double positrack on one side of the belt