
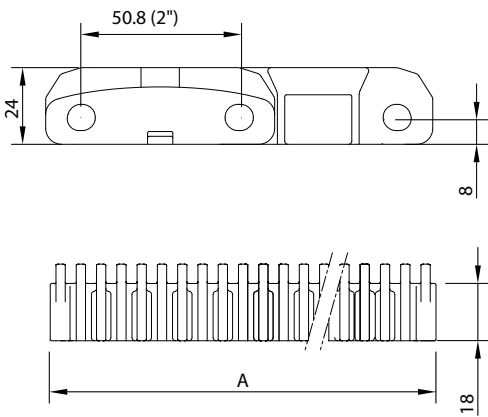



Super Rib 2000

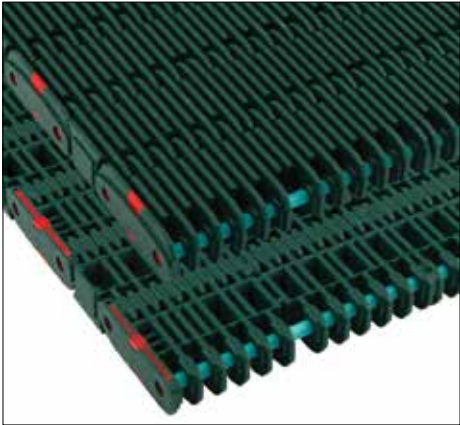

Assembly	Belt Type	Code Number*	Temperature range °C		Working Load (max.)	Weight	Backflex Radius (min.)
			Dry	Wet			
					N/m (21°C)	kg/m ²	mm
USP-Polypropylene with Polypropylene Pins							
Standard	SR 2000 USP	881.50.xx	4 to 104	4 to 104	29500	11.20	75
Positrack	SRP 2000 USP	881.80.xx					

* In code numbers xx corresponds with the belt width (A), starting with 10 for 3", 11 for 6" and so on in steps of 3". 2000 Belts with Positrack start with 12 for 9". See also page 208.

Chain assembly tool (chain tensioner) code 800.00.44.

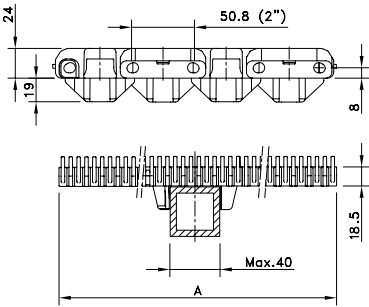

Super rib 2000 belt with positrack in the center of the belt or 1.5" Offset, depending on the width