


Magnetflex® Heavy Duty Max-Line

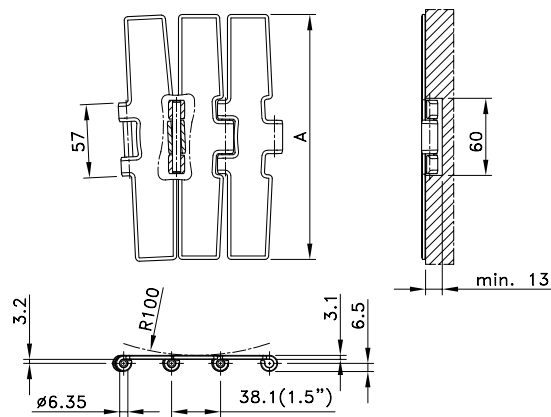


Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		A					
		mm	inch	kg/m	mm		N
60-Series							
60 M 75 M	767.53.75	190.5	7.50	5.03	0.60	yes	7000
66-Series							
66 M 75 M XHB	767.03.75	190.5	7.50	5.03	0.60	yes	7000

Standard length: 3.048 m - 10 feet (80 links).

Sideflex radius min. 860 mm.

NOTE: 60 M 75 M is recommended for medium duty applications, 66 M 75 M is recommended for heavy duty applications.

Magnetflex® Single Hinge 1"

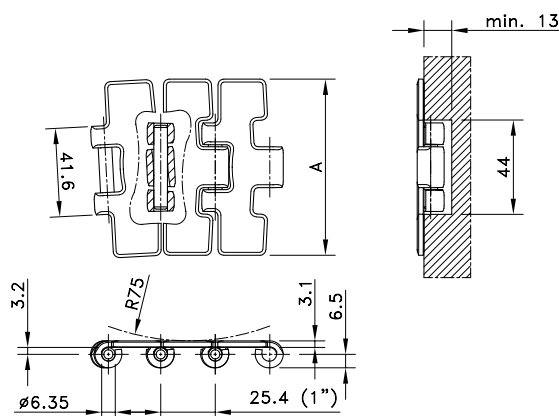

Chain Type	Code Number	Plate Width		Weight	Surface Flatness (max.)	Polished Hinge Eyes	Working Load (max.)
		mm	inch				
Opti-Plus							
SSC 581 M-K325	10.027.21.11*	82,5	3,25	2,80	0,18	no	5000

Standard length: 3.048 m - 10 feet (120 links).

Sideflex radius min. 500 mm.

* Ask customer service for minimum order quantity.