

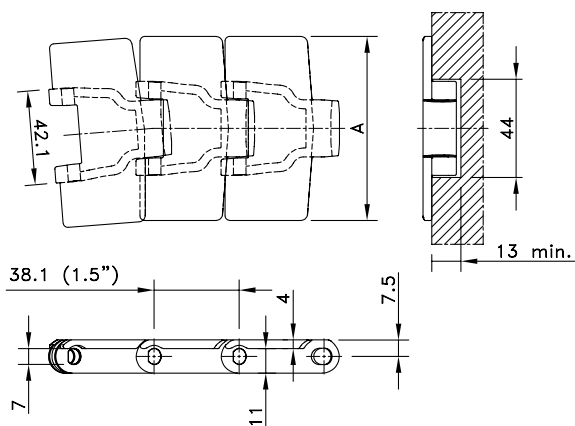


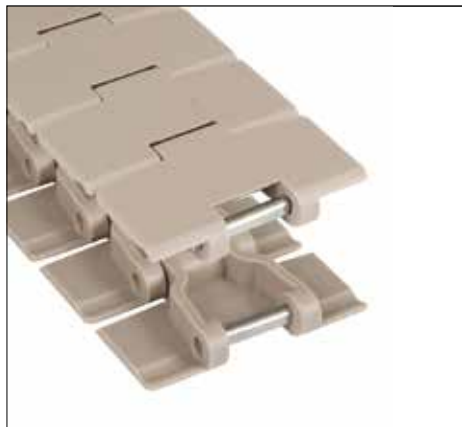

Chain Type	Code Number	Plate Width		Weight	Sideflex Radius (min)	Working Load (max.)	Backflex Radius (min)	Plate Thickness
		A						
		mm	inch	kg/m	mm	N (21°C)	mm	mm
XL-Acetal								
RHMP 325 XL	781.10.07	82.5	3.25	0.82	500	2100	50	4,0
RHMP 84 XL	781.10.13	83.8	3.30	0.82				
RHM 350 XL	781.12.32	88.9	3.50	1.10	457			
RHM 450 XL	781.12.42	114.3	4.50	1.16				
HP-Acetal								
RHMP 325 HP	781.10.20	82.5	3.25	0.82	500	2100	50	4,0
PSX Advanced Performance Polymer Alloy								
RHMP 325 PSX	781.10.48	82.5	3.25	0.82	500	2100	50	4,0
RHMP 84 PSX	781.10.46	83.8	3.30	0.82				
BWX-Polyamide Composite								
RHMP 84 BWX	781.10.49	83.8	3.30	0.82	500	2100	50	4,0

Standard length: 3.048 m - 10 feet (80 links).

Magnetflex® With Thick Top Plate

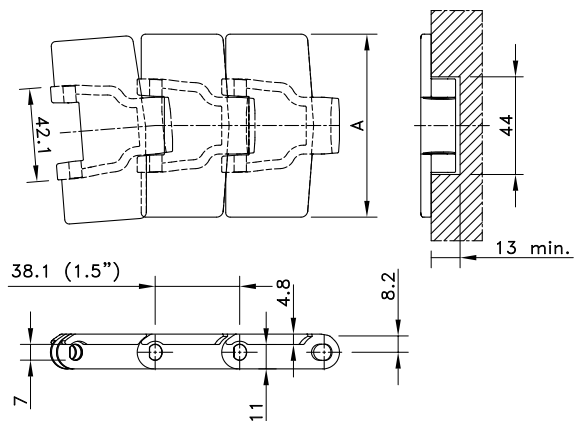

Chain Type	Code Number	Plate Width		Weight	Sideflex Radius (min)	Working Load (max.)	Backflex Radius (min)	Plate Thickness
		A						
		mm	inch	kg/m	mm	N (21°C)	mm	mm
XL-Acetal								
RHMDP 325 XL	781.10.10	82.5	3.25	1.08	500	2100	50	4,8
RHMD 450 XL	781.22.42	114.3	4.50	1.26	457			
PSX Advanced Performance Polymer Alloy								
RHMDP 325 PSX	781.10.47	82.5	3.25	0.87	500	2100	50	4,8

Standard length: 3.048 m - 10 feet (80 links).