


## Straight Run Vacuum

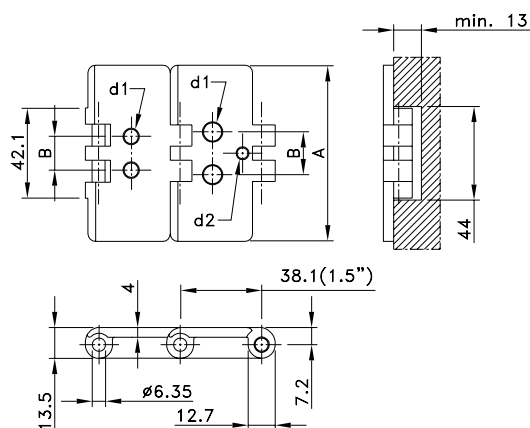

| Chain Type           | Code Number | Plate Width<br>A |      | Weight<br>kg/m | Distance<br>Between<br>Holes<br>B | Hole<br>Diameter<br>d1 | Working<br>Load<br>(max.)<br>N (21°C) | Backflex<br>Radius<br>(min)<br>mm | Plate<br>Thickness<br>mm |
|----------------------|-------------|------------------|------|----------------|-----------------------------------|------------------------|---------------------------------------|-----------------------------------|--------------------------|
|                      |             | mm               | inch |                |                                   |                        |                                       |                                   |                          |
| LF-Acetal            |             |                  |      |                |                                   |                        |                                       |                                   |                          |
| LF 820-K325 V2**     | L0820638301 | 82.5             | 3.25 | 0.83           | 19                                | 6.5                    | 1230                                  | 40                                | 4.0                      |
| LF 820-K350 V2**     | L0820692431 | 88.9             | 3.50 | 0.87           | 45                                | 4.0                    |                                       |                                   |                          |
| LF 820-K450 V2 I30** | L0820613392 | 114.3            | 4.50 | 1.03           | 30                                | 8.0                    |                                       |                                   |                          |
| LF 820-K450 V2 I50** | L0820670221 | 114.3            | 4.50 | 1.03           | 50                                | 8.0                    |                                       |                                   |                          |
| LF 820-K325 V3***    | L0820615961 | 82.5             | 3.25 | 0.83           | 20                                | 7.9                    |                                       |                                   |                          |


\*\* 2 holes.

\*\*\* 3 holes. Hole diameter 3<sup>rd</sup> hole (d2) is 4.4 mm.

Standard length: 3.048 m - 10 feet (80 links).

Minimum order quantity 30.48 m - 100 feet.

## Straight Run Miniature

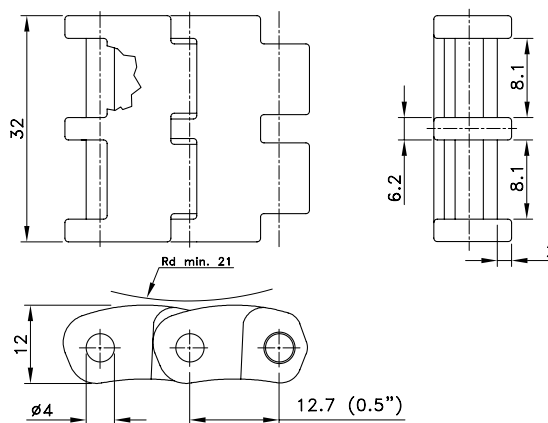

| Chain Type | Code Number | Plate Width |      | Weight | Working Load (max.) | Backflex Radius (min) | Plate Thickness |
|------------|-------------|-------------|------|--------|---------------------|-----------------------|-----------------|
|            |             | A           |      |        |                     |                       |                 |
|            |             | mm          | inch | kg/m   | N (21°C)            | mm                    | mm              |
| D-Acetal   |             |             |      |        |                     |                       |                 |
| ZN 1108*   | L1108WZN    | 32.0        | 1.26 | 0.51   | 800                 | 21                    | 12.0            |
| SS 1108**  | L1108WSS    |             |      |        |                     |                       |                 |

\* With zinc plated pins.

\*\* With stainless steel pins.

Standard length: 5 m - 16.4 feet (395 links).

These chains are recommended for packaging machines of pharmaceutical, cosmetic and food products; if installed to the base chain, it facilitates product head transfers.