


Flush Grid Magnetflex® 1050



Chain Type	Code Number	Plate Width		Weight	Sideflex Radius (min)	Working Load (max.)	Backflex Radius (min)	Plate Thickness
		A						
		mm	inch	kg/m	mm	N (21°C)	mm	mm
XLG-Acetal								
FGM 1050 XLG	749.11.31	83.8	3.30	1.54	500	1650	130	8.7
PSX Advanced Performance Polymer Alloy								
FGM 1050 PSX	749.10.52	83.8	3.30	1.54	500	1650	130	8.7

Standard length: 3.048 m - 10 feet (120 links).

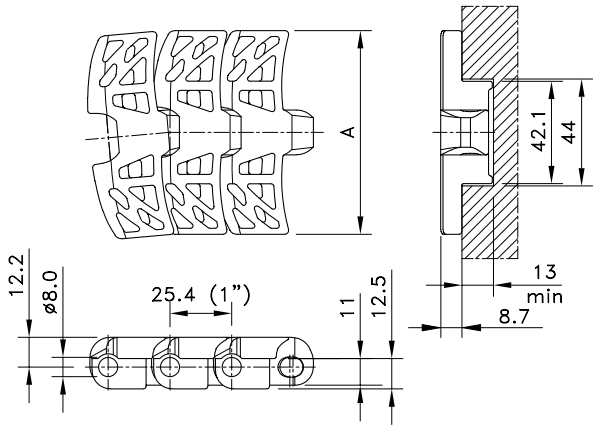