



1702

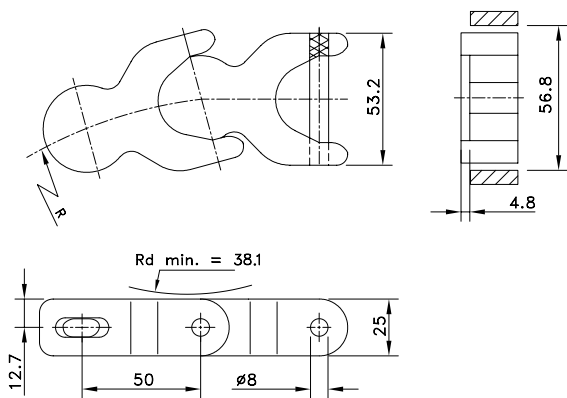

| Chain Type | Code Number | Link Width |      | Weight | Working Load (max.) | Backflex Radius (min) | Sideflex Radius (min) |
|------------|-------------|------------|------|--------|---------------------|-----------------------|-----------------------|
|            |             | A          |      |        |                     |                       |                       |
|            |             | mm         | inch | kg/m   | N (21°C)            | mm                    | mm                    |
| WLF-Acetal |             |            |      |        |                     |                       |                       |
| WLF 1702   | L1702698592 | 53.1       | 2.09 | 1.43   | 2670                | 38                    | 140                   |

Standard length: 3.05 m - 10 feet (61 links).

1720

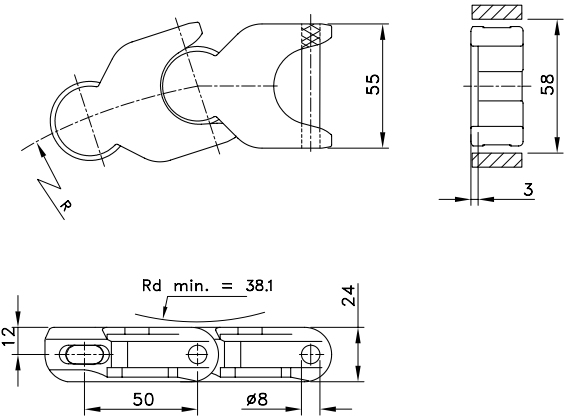

| Chain Type | Code Number | Link Width |      | Weight | Working Load<br>(max.) | Backflex Radius<br>(min) | Sideflex Radius<br>(min) |
|------------|-------------|------------|------|--------|------------------------|--------------------------|--------------------------|
|            |             | A          |      |        |                        |                          |                          |
|            |             | mm         | inch |        |                        |                          |                          |
| HP-Acetal  |             |            |      |        |                        |                          |                          |
| HP 1720    | L1720HP     | 55.0       | 2.17 | 1.26   | 2600                   | 50                       | 140                      |

Standard length: 10 m - 32.8 feet (200 links).