



Sideflex Reinforced with TABS

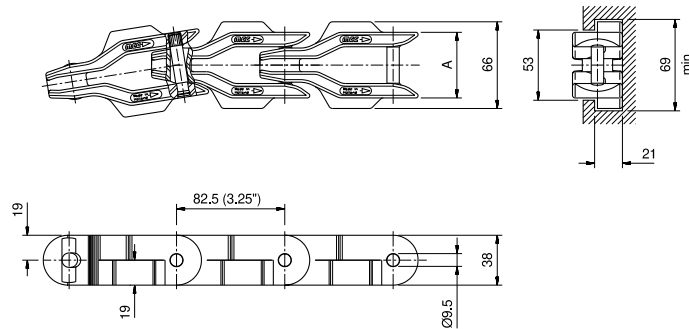

Chain Type	Code Number	Link Width		Weight	Working Load (max.)	Backflex Radius (min)	Sideflex Radius (min)
		A					
		mm	inch	kg/m	N (21°C)	mm	mm
XL-Acetal							
CC 1400 TXL	752.32.04	50.0	1.97	1.75	6500	50	660
NC-Acetal							
CC 1400 TNC	752.35.04	50.0	1.97	1.75	6500	50	660

Standard length: 3.053 m - 10 feet (37 links).

Sideflex Reinforced with Tabs with Higher Link

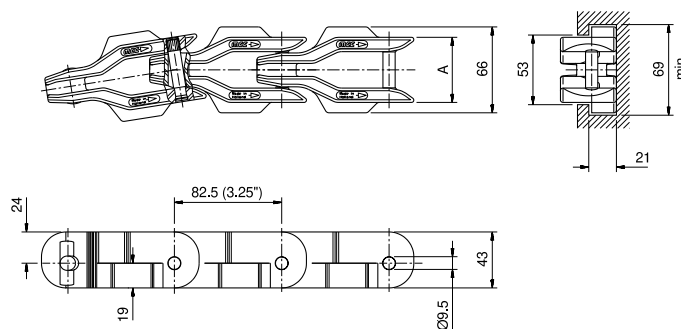

Chain Type	Code Number	Link Width		Weight	Working Load (max.)	Backflex Radius (min)	Sideflex Radius (min)
		A					
		mm	inch	kg/m	N (21°C)	mm	mm
XL-Acetal							
CC 1431 TXL	752.92.04	50.0	1.97	2.02	6500	50	660
NC-Acetal							
CC 1431 TNC	752.95.04	50.0	1.97	2.02	6500	50	660

Standard length: 3.053 m - 10 feet (37 links).

* Ask customer service for minimum order quantity of CC1431 TBL chains.