


Sideflex ¾" Pitch Tab Steel Top Plate

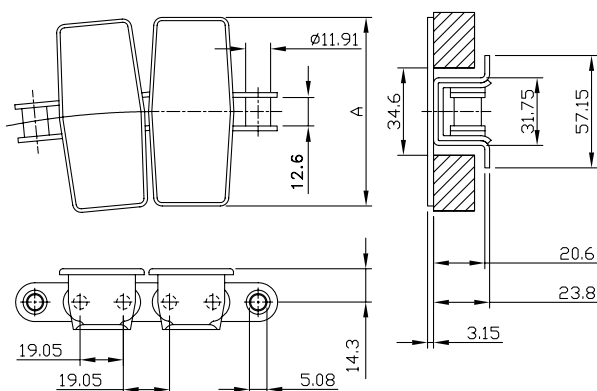

Chain Type	Code Number	Plate Width A		Weight kg/m	Loose Top Plate Code Number	Working Load (max.) N (21°C)	Sideflex Radius (min) mm	Connection Link	
		mm	inch					Type	Code Number

Steel Top Plate/Steel Base Chain

1874 TAB-K325	1874K3-1/4	82.5	3.25	4.20	114-130-1	4500	381	CL-63	36742
1874 TAB-K450	1874K4-1/2	114.3	4.50	4.80	114-130-2		381		
1874 TAB-K600	1874K6	152.4	6.00	5.70	114-130-6		457		
1874 TAB-K750	1874K7-1/2	190.5	7.50	6.40	114-130-3		610		


Stainless Steel Top Plate/Stainless Steel Base Chain

1874 TAB SS-K325	1874SSK3-1/4	82.5	3.25	4.20	114-130-4	3400	381	CL-63 SS	36747
1874 TAB SS-K450	1874SSK4-1/2	114.3	4.50	4.80	114-130-5		381		
1874 TAB SS-K600	1874SSK6	152.4	6.00	5.70	114-130-8		457		
1874 TAB SS-K750	1874SSK7-1/2	190.5	7.50	6.40	114-130-7		610		

Standard length: 3.048 m – 10 feet (160 links).

Min. backflex radius 254 mm.

Sideflex ¾" Pitch Tab Small Gap 11,8 mm

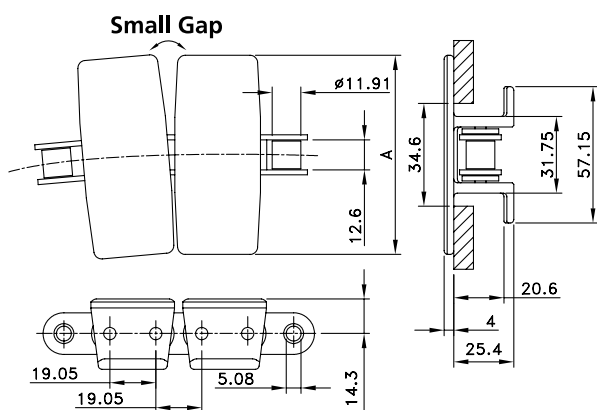

Chain Type	Code Number	Plate Width A		Weight kg/m	Loose Top Plate Code Number	Working Load (max.) N (21°C)	Sideflex Radius (min) mm	Connection Link	
		mm	inch					Type	Code Number

LF-Acetal Top Plate/Steel Base Chain

LF 1873 TAB SG-K450	L1873683662	114,3	4,50	2,30	L1873645963	4500	610	CL-63	36742
---------------------	-------------	-------	------	------	-------------	------	-----	-------	-------

BWR-Top Plate/Steel Base Chain

BWR 1873 TAB SG-K450	L1873683642	114,3	4,50	2,30	L1873645973	4500	610	CL-63	36742
----------------------	-------------	-------	------	------	-------------	------	-----	-------	-------

WX-Polyamide Composite Top Plate/Steel Base Chain

WX 1873 TAB SG-K450	L1873683652	114,3	4,50	2,30	L1873645983	4500	610	CL-63	36742
---------------------	-------------	-------	------	------	-------------	------	-----	-------	-------