

Articulated Feet

in reinforced polyamide and polypropylene

Ø124

REXNORD

- **Best Seller**
- **Standard**
- ✓ **On request**

Spindle type

mm

Footplate in polyamide PA FV

Footplate in polypropylene PP FV

Code

feet supplied without anti-slip

Fmax.
N


Spindle in stainless steel

M16	255	200	21	-	13	604993	-	45000 (PA FV)
M20	140	81	-	22	30	624802	628682	
	205	146	-	22	30	624812	628692	
M24	205	152	21	-	19	624822	628702	13000 (PP FV)
M30	205	152	21	-	24	624832	628712	

Spindle in zinc plated steel								
M16	255	200	-	22	24	624842	628722	45000 (PA FV)
	255	200	21	-	13	604983	-	
M20	140	81	-	22	30	624852	628732	13000 (PP FV)
	205	146	-	22	30	624862	628742	
	205	154	21	-	17	611653	636162	
M24	255	195	-	22	30	624872	628752	
	145	91	21	-	19	624882	628762	
	205	152	21	-	19	624892	628772	


Item code for order = Part. + Code

- Footplate material: reinforced polyamide PA FV (black) and reinforced polypropylene PP FV (black).
- Packaging: 8 pieces.
- Anti-slip supplied separately (on request supplied fixed to the foot).
- On request different length.
- Fmax. = maximum applicable load in static conditions.

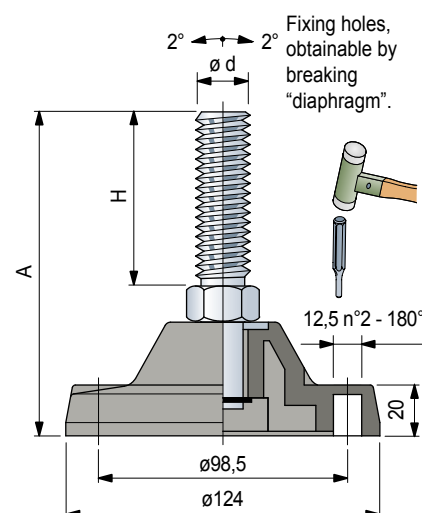

Accessories

Anti-slip




- Code with reinforcement disc: **R0000630082**.
- Code without reinforcement disc: **R0000630092**.
- Assembly: with screws for plate supplied loose.
- Material: NBR rubber (black), 80 Shore.
- Packaging: 8 pieces.


Part. R0726 - Spacer



- Code: **688772**.
- Material: acetal POM (black).
- Weight: 1,15 Kg.
- Packaging: 8 pieces.

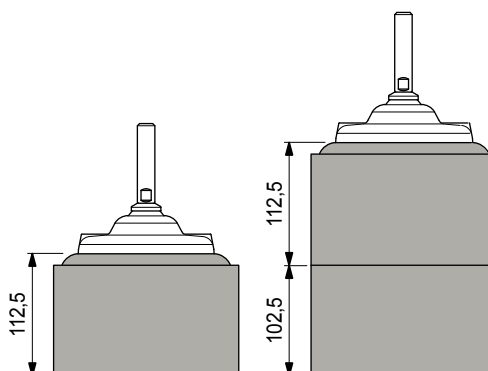

Nut + Washer



Code		h	s	ØD	s
Stainless steel AISI 304	Zinc plated steel	mm	mm	mm	mm
M16	R0000630212	13	24	30	3
M20	R0000630222	16	30	37	3
M24	R0000630232	19	36	44	4
M30	R0000630242	24	46	56	4

Packaging: 8 pieces