


## Part. S0834



### Neck transport guides

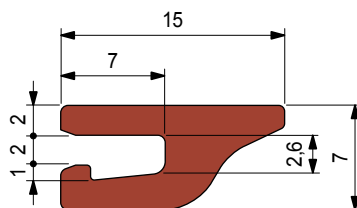


Material	Packaging	Code
UHMWPE	metres	
ULF - brown red	30	UL636473

- Standard packaging: coil.

- **Material:** Polyethylene UHMWPE with molecular density 5.600.000 g/mol.  
Characteristics: new material Polyethylene ULF brown red (UHMWPE): reduced friction coefficient, higher wear resistance.
- **Linear expansion coefficient:**  $2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$   
Calculation of thermal expansion see Technical information.
- **Operating temperature ULF - brown red:**  
In air (- 40 to + 45 °C).  
In hot water (+ 45 °C).
- **Polyethylene ULF is FDA approved**  
Polyethylene ULF complies with the Code of Federal Regulations Title 21, § 177.1520 "Olefin Polymers" of the Food and Drug Administration (FDA) of April 1, 2008.


- **Use** Part. S0834 - S0838  
Overhead transport of PET bottles.

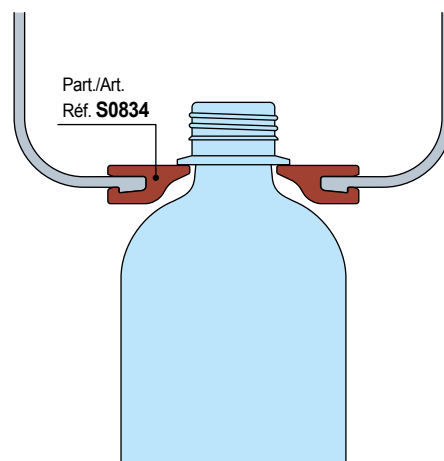

## Part. S0838




### Neck transport guides

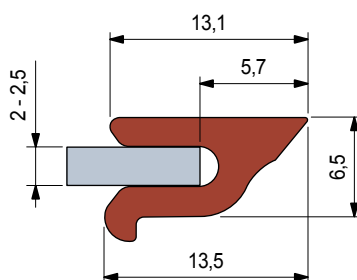

Material	Packaging	Code
UHMWPE	metres	
ULF - brown red	30	UL637613

- Standard packaging: coil.

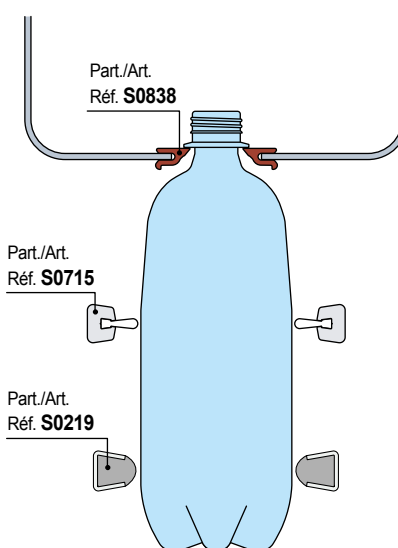

Best Seller

Standard

On request: minimum quantity may apply.  
Consult our Customer Service for availability.

Item code for order = Part. + Code