


Part. S0839

Neck transport guides

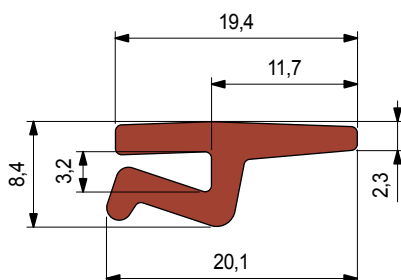

Material	Packaging	Code
UHMWPE	metres	
ULF - brown red	30	UL640063

- Standard packaging: coil.

• **Material:** Polyethylene UHMWPE with molecular density 5.600.000 g/mol.
Characteristics: new material Polyethylene ULF brown red (UHMWPE): reduced friction coefficient, higher wear resistance.

• **Linear expansion coefficient:** $2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$
Calculation of thermal expansion see Technical information.

• **Operating temperature ULF - brown red:**


In air (- 40 to + 45 °C).

In hot water (+ 45 °C).

• **Polyethylene ULF is FDA approved**


Polyethylene ULF complies with the Code of Federal Regulations Title 21, § 177.1520 "Olefin Polymers" of the Food and Drug Administration (FDA) of April 1, 2008.

• **Use** Part. S0839 - S0835 - S0594 - S0654
Overhead transport of PET bottles.

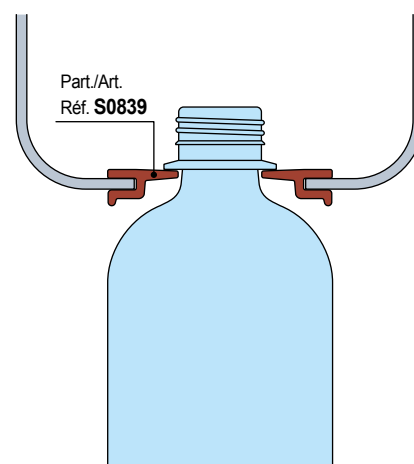

Part. S0835


Neck transport guides



Material	Length	Code
UHMWPE	metres	
ULF - brown red	3	UL636573N

- Min. curvature radius: 750 mm.

- Packaging: 45 metres.

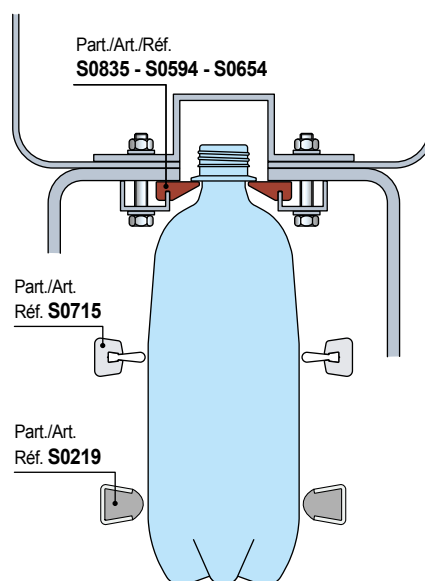

Best Seller

Standard

On request: minimum quantity may apply.
Consult our Customer Service for availability.

Item code for order = Part. + Code