



- **Material:** Polyethylene UHMWPE with molecular density 5.600.000 g/mol.
Characteristics: new material Polyethylene ULF brown red (UHMWPE): reduced friction coefficient, higher wear resistance.
- **Operating temperature White, Green, Black:**
In air (- 40 to + 80 °C).
In hot water (+ 70 °C).
- **Operating temperature ULF - brown red:**
In air (- 40 to + 45 °C).
In hot water (+ 45 °C).
- **Polyethylene ULF is FDA approved**
Polyethylene ULF complies with the Code of Federal Regulations Title 21, § 177.1520 "Olefin Polymers" of the Food and Drug Administration (FDA) of April 1, 2008.

- **Use of Part. S0770 - S0769** Medium strength containers. (ex. latten, glass)

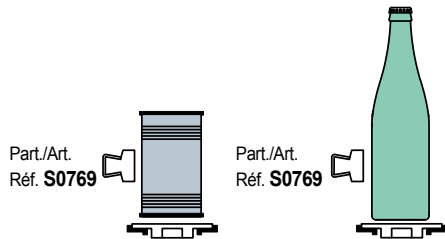

Guide rail (flat)



S mm	H mm	A mm
1,5	17	16
2	17,5	17

Part. S0770



Thickness S mm	Metal profile material	Length metres	Code	Weight kg/m
1,5	Austenitic stainless steel	3	609183N	0,61
		6	609193N	
	Zinc plated steel	3	609203N	
2	Austenitic stainless steel	3	609213N	0,71
		6	609223N	

- Colour: white.
- Antistatic polyethylene UHMWPE (black) available upon request with minimum quantities.
- Min. curvature radius: 160 mm.
- Linear expansion coefficient: $4 \times 10^{-5} \text{ }^{\circ}\text{C}^{-1}$.
- Calculation of thermal expansion see Technical information.
- Packaging: 24 metres.
- Accessories:




Guide - Rail
Clamps.



Guide rail bending
machine (manual)
Part. S0218.

Guide rail (flat)



S mm	H mm	A mm
1,5	20,5	16
2	21	17

Part. S0769



Thickness S mm	Metal profile material	Length metres	Code	Weight kg/m
1,5	Austenitic stainless steel	3	609133N	0,67
		6	609143N	
	Zinc plated steel	3	609153N	
2	Austenitic stainless steel	3	609163N	0,78
		6	609173N	

- Colour: white.
- Antistatic polyethylene UHMWPE (black) available upon request with minimum quantities.
- Min. curvature radius: 160 mm.
- Linear expansion coefficient: $4 \times 10^{-5} \text{ }^{\circ}\text{C}^{-1}$.
- Calculation of thermal expansion see Technical information.
- Packaging: 24 metres.
- Accessories:



Guide - Rail
Clamps.



Guide rail bending
machine (manual)
Part. S0218.

Best Seller

Standard

On request: minimum quantity may apply.
Consult our Customer Service for availability.

Item code for order = Part. + Code