



Types of guides

using our 40x8 metal profile.


Part. S0539




Part. S0605




Part. S0580




Part. S0557




Part. S0581




Part. S0585 - S0597




Part. S0628 S





Part. S0733




Part. S0721



Deflection of Part. S0537

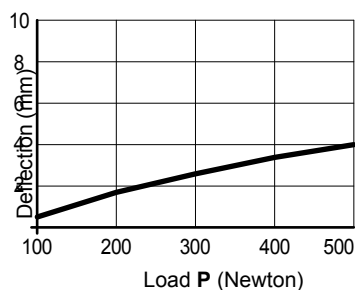

Metal profile 40x8

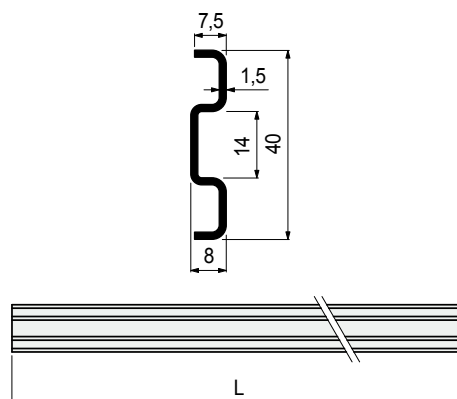


Material	Length L mm	Code
Austenitic stainless steel	3209	689231
	6425	689241

- Min. curvature radius: 500 mm.
- Weight: 0,72 Kg/m.
- Packaging: 19,25 metres (in 3209 mm length),
19,27 metres (in 6425 mm length).
- Accessories:



Guide rail bending
machine (manual)
Part. S0218.

Bolts set

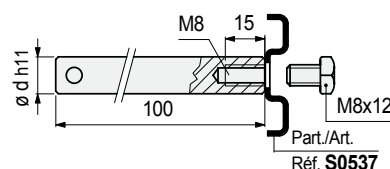

pin dia. d mm	Code	Weight kg/m
12	684641	0,12
14	684651	

- Material: austenitic stainless steel.
- State of supply: complete with screw M8 x 12.
- Packaging: 24 pieces.

Part. S0537



Part. S0535



Best Seller

Standard

On request: minimum quantity may apply.
Consult our Customer Service for availability.

Item code for order = Part. + Code