

Part. S0128S

Sideflexing



Part. S0128

Straight run




Part. S0128

Straight run



Roller side guides

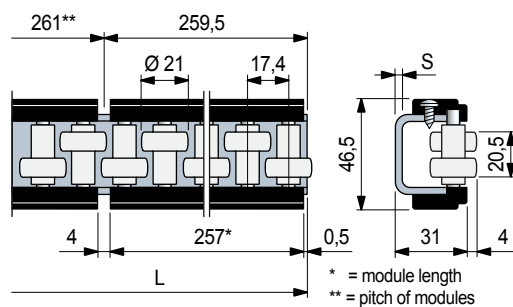

S mm	L mm	Metal profile and screws material	Code	Weight kg/m
---------	---------	--------------------------------------	------	----------------

Part. S0128S Sideflexing

2	3129	Zinc plated steel	6413600	2,06
		Austenitic stainless steel	6346600	

Part. S0128 Straight run

	1041	Zinc plated steel	64531	
		Austenitic stainless steel	62640	
3	2085	Zinc plated steel	64541	2,6
		Austenitic stainless steel	62670	
	3129	Zinc plated steel	64551	
		Austenitic stainless steel	63350	

- Material: rollers in acetal POM (white).

Side straps in polyamide PA (black).

Roller pins in ferritic stainless steel.

- Packaging: 2 strands.

- Accessories:




Guide - Rail
Clamps.



Guide rail bending
machine (manual)
Part. S0218.

Roller side guides

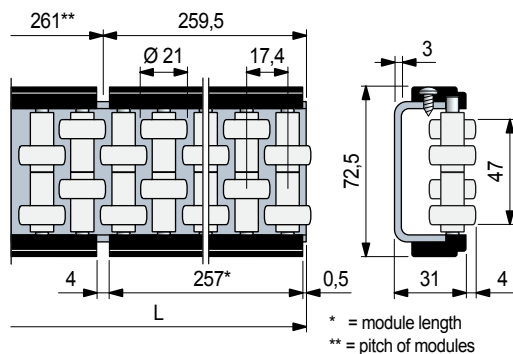

L mm	Metal profile and screws material	Code	Weight kg/m
---------	--------------------------------------	------	----------------

1041	Zinc plated steel	64501	
	Austenitic stainless steel	62650	
2085	Zinc plated steel	64511	3,8
	Austenitic stainless steel	62680	
3129	Zinc plated steel	64521	
	Austenitic stainless steel	63340	

- Material: rollers in acetal POM (white).

Side straps in polyamide PA (black).

Roller pins in ferritic stainless steel.

- Packaging: 2 strands.

- Accessories:




Guide - Rail
Clamps.

Use of Part. S0128S - S0128


Rugged containers (ex. cases, cartons).

Modular system

Guides are made of 257 mm long modules fixed on a metal "C" profile.

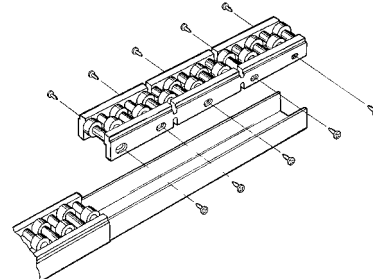

Min. curvature radius (only for Part. S0128S)

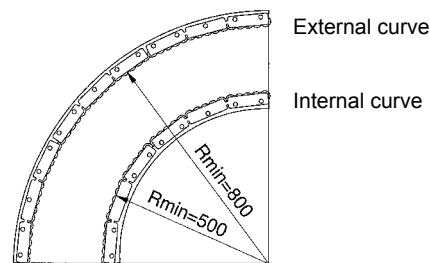


Curving procedure

- Disassemble the modules


- Curve the metal profile using the manual bending machine.

- Reassemble the modules

(the flexibility of the side straps make them easily adaptable to the curved profile).



Deflection of Part. S0128S - S0128

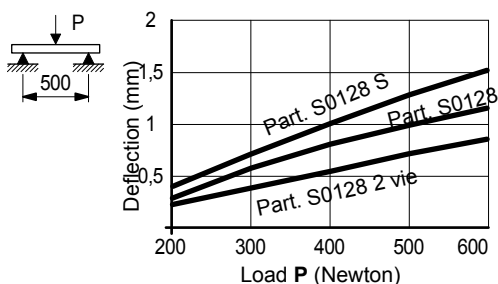


Use of Part. S0128

Rugged containers (ex. cases, cartons).

Modular system Part. S0128

Guides are made of 257 mm long modules fixed on a metal "C" profile.

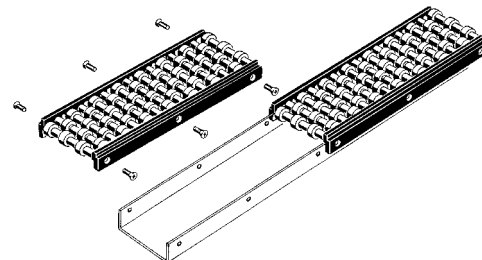

Best Seller

Standard

On request: minimum quantity may apply.
Consult our Customer Service for availability.

Item code for order = Part. + Code