


Part. S0619



For round tubes


Support base (bipod)

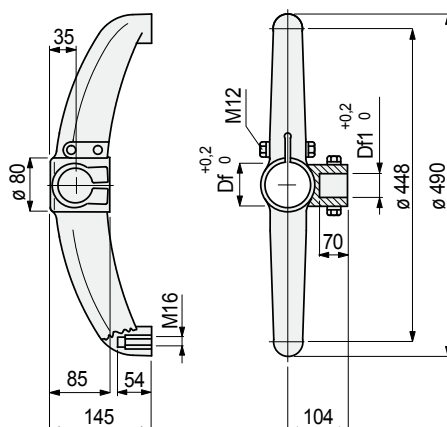

Vertical tube dia. mm	Horizontal tube dia. mm	Bore dia. Df mm	Bore dia. Df1 mm	Code
Bolts in austenitic stainless steel				
42,4 (1 ³ / ₄)	42,4 (1 ³ / ₄)	42,4	42,4	624352
48,3 (1 ¹ / ₂)	42,4 (1 ³ / ₄)	48,3	42,4	624372
48,3 (1 ¹ / ₂)	48,3 (1 ¹ / ₂)	48,3	48,3	692052
50,8	42,4 (1 ³ / ₄)	50,8	42,4	624402
60,3 (2")	42,4 (1 ³ / ₄)	60,3	42,4	624432
Bolts in zinc plated steel				
42,4 (1 ³ / ₄)	42,4 (1 ³ / ₄)	42,4	42,4	638842
48,3 (1 ¹ / ₂)	42,4 (1 ³ / ₄)	48,3	42,4	638852
48,3 (1 ¹ / ₂)	48,3 (1 ¹ / ₂)	48,3	48,3	600213
50,8	42,4 (1 ³ / ₄)	50,8	42,4	638862
60,3 (2")	42,4 (1 ³ / ₄)	60,3	42,4	638872


- Material: support base in reinforced polyamide PA FV (black), brass threaded bushings.
- Weight: 1,05 Kg.
- Max recommended tightening torque: 3,6 Kgm.
- Packaging: 12 pieces.

Assembly of Part. S0619

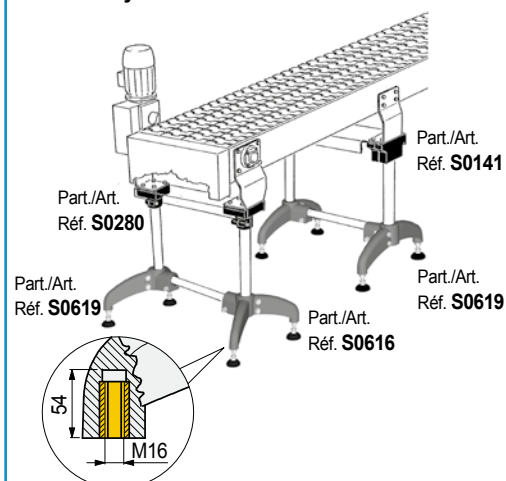


Detail of the insert for the levelers.


Sliding load



Max applicable load




Deflection

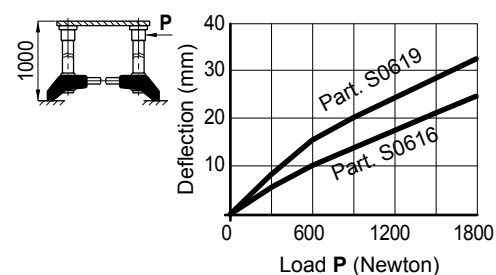

Tests performed at tightening torque: 3,6 Kgm

Types of levelers that can be used



Part./Art./Réf. R0098 - R0133 - R0323

Best Seller

Standard

On request: minimum quantity may apply.
Consult our Customer Service for availability.

Item code for order = Part. + Code