

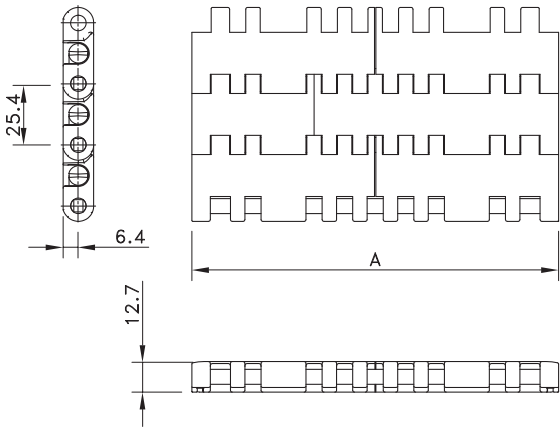


Solid Top 7705

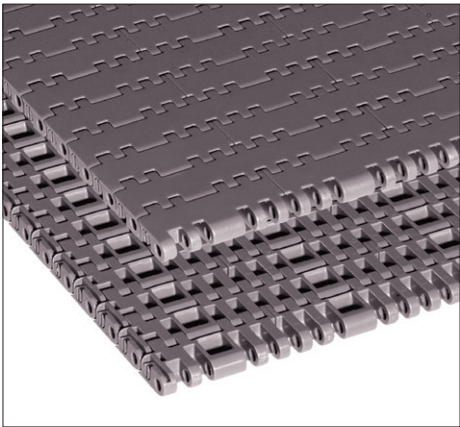

Assembly	Belt Type	Code Number*	Temperature range °C		Working Load (max.)	Weight	Backflex Radius (min.)
			Dry	Wet	N/m (21°C)	kg/m²	mm
HP-Acetal with PBT Pins							
Standard	HP 7705	I7705HPKxx	-40 to +80	-40 to +65	43000 N/m	13.47 kg/m²	25
DTS Left Positrack	HP7705DTS-4.5IN_MTW_PT_LH	10028409					
	HP7705DTS-7.5IN_MTW_PT_LH	10374619					
DTS right Positrack	HP7705DTS-4.5IN_MTW_PT_RH	10028410					
	HP7705DTS-7.5IN_MTW_PT_RH	10028415					
Mould to width positrack	HP7705-3.25IN_MTW_PT	10028408			3047 N	1.03 kg/m	
	HP7705-4.5IN_MTW_PT	10028412			4559 N	1.39 kg/m	
	HP7705-7.5IN_MTW_PT	10285507			7784 N	2.58 kg/m	
BWX-Polyamide with Polyacetal Pins							
Standard	BWX7705	BWX7705-xx	-40 to +80	Not recommended	43000 N/m	13.47 kg/m²	25
Mould to width positrack	BWX7705-3.25IN_MTW_PT	10146200			3047 N	1.03 kg/m	
	BWX7705-4.5IN_MTW_PT	10146012			4559 N	1.39 kg/m	
	BWX7705-7.5IN MTW PT	10282299			7784 N	2.58 kg/m	

* In code numbers xx corresponds with the belt width (A). Standard widths of these belts begin at 6" with 3" increments up to 120". Special widths start from 5" with ½" increments. see also page 208. Upon request 7705 belts can be supplied in metric versions. 7705 belts are also available with rubber top in HTF and TCF versions. Please contact Customer Service for more details.

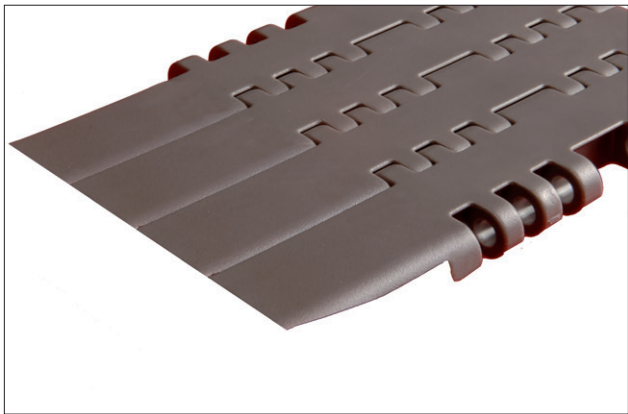

Dynamic Transfer System (DTS®)

