


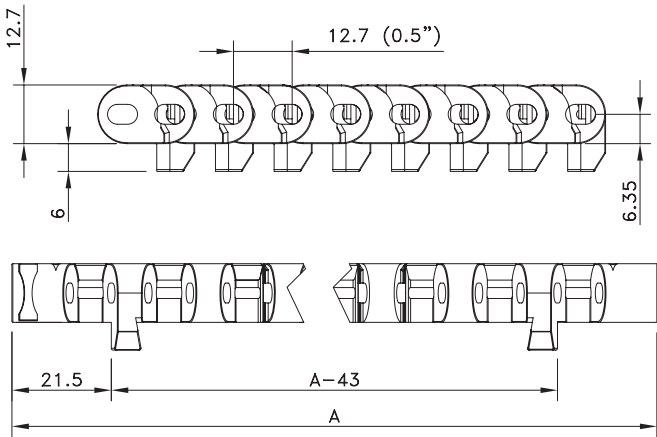
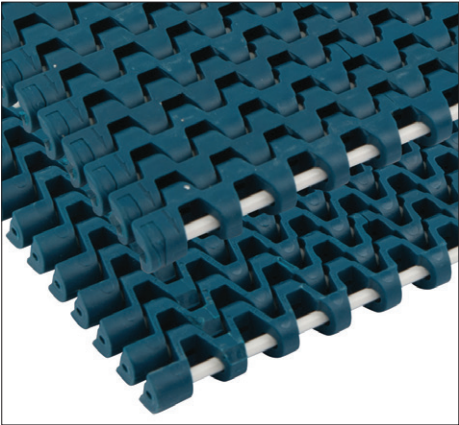


Radius 505




Assembly	Belt Type	Code Number*	Width A	Sideflex radius inside (min.)	Working Load (max.)		Temperature range °C		Weight	Backflex Radius (min.)
					Straight	in curve				
			mm	mm	N/m	N	Dry	Wet	kg/m²	mm
XLG-Acetal With Reinforced Plastic Pins										
	RBP 505 XLG 255	867.30.12	255	510	15000	1300	-40 TO +80	-40 TO +65	10.0	15
	RBP 505 XLG 340	867.30.13	340	680						
	RBP 505 XLG 425	867.30.14	425	850						
	RBP 505 XLG 510	867.30.15	510	1020						
	RBP 505 XLG 595	867.30.16	595	1190						
	RBP 505 XLG 680	867.30.17	680	1360						
WSM-Acetal With Reinforced Plastic Pins										
Positrack	WSM 505 RBP	868.30.xx	255 to 680	x belt width	15000	1300	-40 TO +80	-40 TO +65	10.0	15
SMB-Acetal With Reinforced Plastic Pins										
Positrack	SMB 505 RBP	868.50.xx	255 to 680	x belt	15000	1300	-40 TO +80	-40 TO +65	10.0	15


* In code numbers xx corresponds with the belt width (A), starting with 12 for 255 mm, 13 for 340 mm and so on with 85 mm increments up to 680 mm; wider belts available upon request. See also page 208.

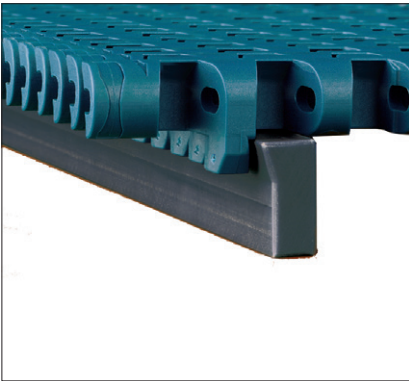


Curve guiding profile for 505

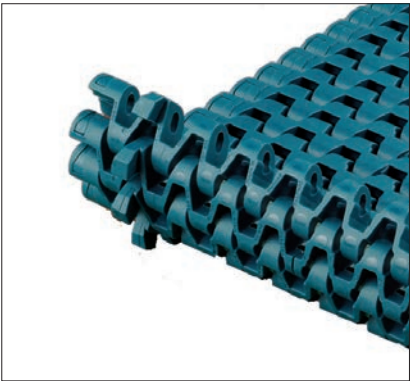

Standard positrack lugs on both sides

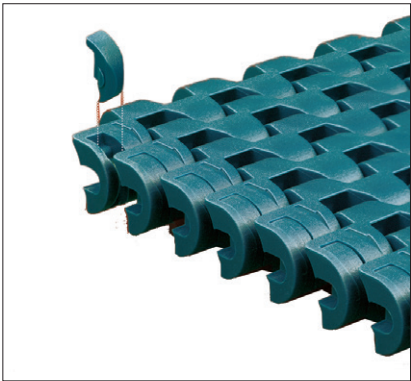

Pin retention clips for easy (dis)assembly

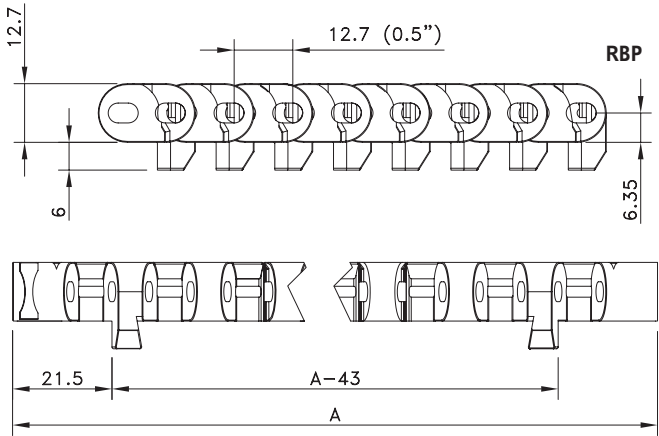

The curve guiding profile for the 505 has a standard length of 1.8 meters; it is made of MCC 3500 special polyamide, code nr. 800.00.01, or MCC 3600 polyester for direct food contact, code nr. 800.00.13, ULF-profile: 10383606