
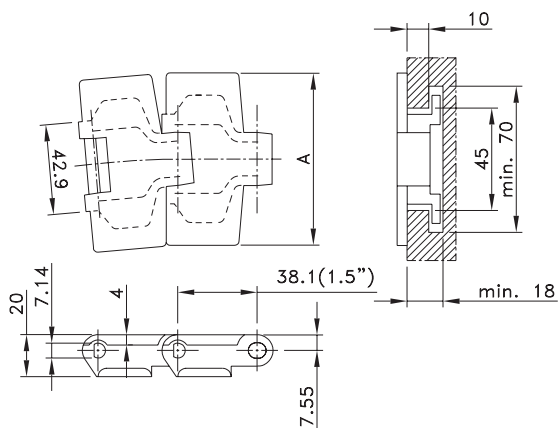


Standard Radius Single Hinge Tab

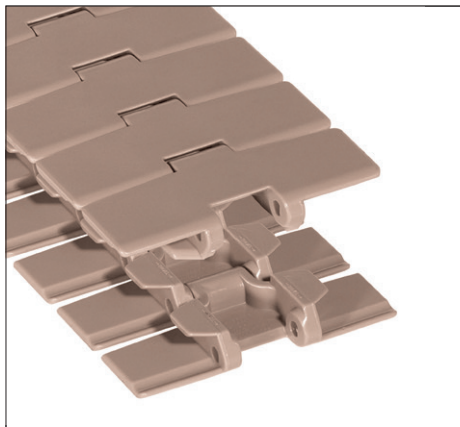

Chain Type	Code Number	Plate Width		Weight	Sideflex Radius (min)	Working Load (max.)	Backflex Radius (min)	Plate Thickness
		A						
		mm	inch	kg/m	mm	N (21°C)	mm	mm
LF-Acetal								
LF880TAB-3.25IN	10177740	82.5	3.25	0.94	457	2100	40	4.0
LF880TAB-3.3IN	10375008	83.8	3.3	1.01				
LF880TAB-3.43IN	10374085	87.0	3.43	1.01	500			
LF880TAB-3.5IN	10144724	88.9	3.50	1.01				
LF880TAB-3.5IN	10177743	114.3	4.50	1.08	457	1050		
LF880TAB-3.25IN_PA	10374145	82.5	3.25	0.74		2100		
LF880TAB-3.25IN SS316	10374084	82.5	3.25	0.94	500	1050		
LF880TAB-4.5IN PA-PIN	10374084	114.3	4.50	0.91		2100		
LF880TAB-4.5IN SS316	10373676	114.3	4.50	1.08				
HP-Acetal								
HP880TAB-3.25IN	10144626	82.5	3.25	0.94	457	2100	40	4.0
HP880TAB-3.25IN SS316	10373670	82.5	3.25	0.94				
HP880TAB-4.5IN	10144627	114.3	4.50	1.08	500			
HP880TAB-4.5IN SS316	10373669	114.3	4.50	1.08				
BWX-Polyamide Composite								
BWX880TAB-3.25IN	10374144	82.5	3.25	0.94	457	2100	40	4.0
BWX880TAB-4.5IN	10373676	114.3	4.50	1.08	500			
Advanced Performance Polymer Alloy								
BWX880TAB-4.5IN	10288394	82.5	3.25	0.94	457	2100	40	4.0
PSX880TAB-3.25IN SS	10374096	82.5	3.25	0.94				
PSX880TAB-4.5IN	10288395	114.3	4.50	1.08				
PSX880TAB-4.5IN SS	10374097	114.3	4.50	1.08				

* Pins made of black reinforced polyamide for non-magnetic or chemical applications. Minimum order quantity 30.48 mtr - 100 feet.
Standard length: 3.048 m - 10 feet (80 links).