

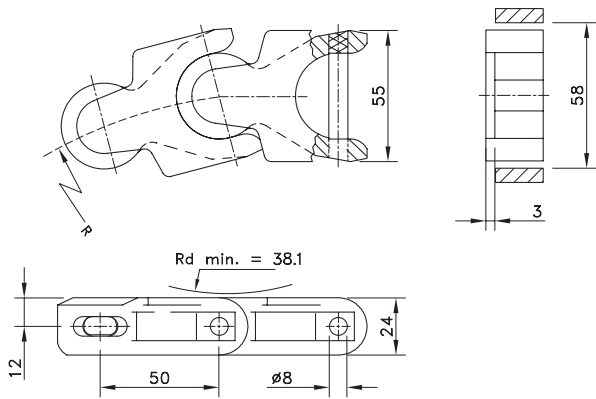


Chain Type	Code Number	Link Width A		Weight	Working Load (max.)	Backflex Radius (min)	Sideflex Radius (min)
		mm	inch				
LF-Acetal							
LF1700-55MM SS PIN	10156539	55.0	2.17	1.26	2670	38.1	140
WLF-Acetal							
WLF1700-55MM SS PIN	10145092	55.0	2.17	1.26	2670	38.1	140
HP-Acetal							
HP1700-55MM	10374004	55.0	2.17	1.26	2670	38.1	140
Acetal with Hardened Steel Top Plates							
LF1700K AC-ZN-55MM ZN PIN	10374002	55.0	2.17	60	2670	38.1	140

Standard length: 10 m - 32.8 feet (200 links).

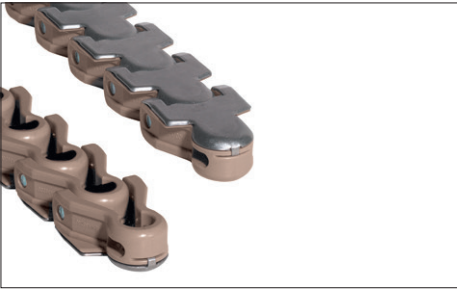


AC (Armor Clad) Execution

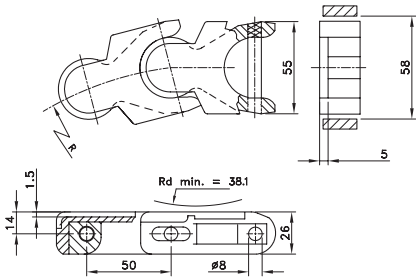

AC (Armor Clad) Execution

1700 TAB K

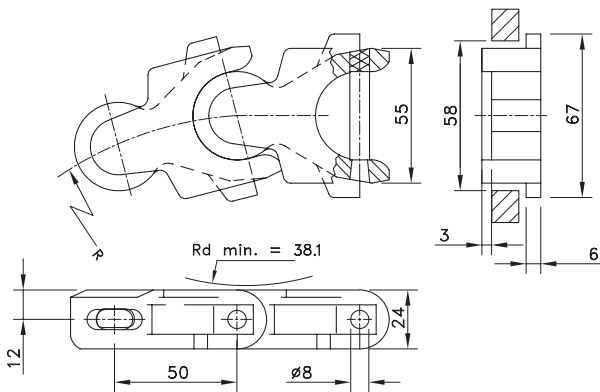

Chain Type	Code Number	Link Width		Weight	Working Load (max.)	Backflex Radius (min)	Sideflex Radius (min)
		A					
		mm	inch				
WLF-Acetal							
WLF1700TAB K-55MM	10183027	55.0	2.17	1.30	2670	38.1	140