
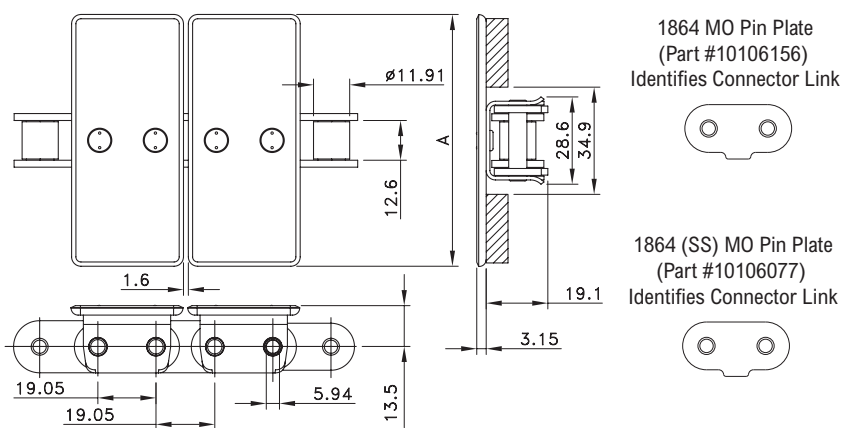




Straight Run ¾" Pitch Steel Top Plate

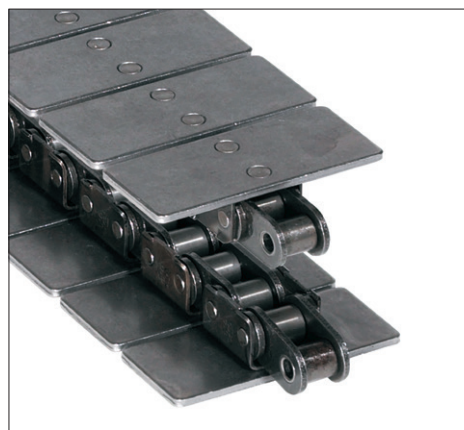

Chain Type	Code Number	Plate Width		Weight	Loose Top Plate	Working Load (max.)	Connection Link	
		A						
		mm	inch	kg/m	Code Number	N (21°C)	Type	Code Number
Steel Top Plate/Steel Base Chain								
S1864 S-3.25IN	10144787	82.5	3.25	3.33	10106067	4500	CONN LINK 1864 S	10106156
S1864 S-4.5IN	10144788	114.3	4.50	4.00	10106068			
S1864 S-6IN	10144789	152.4	6.00	4.40	10106069			
S1864 S-7.5IN	10144790	190.5	7.50	4.80	10106070			
Stainless Steel Top Plate/Stainless Steel Base Chain								
SS1864 SS-3.25IN	10144792	82.5	3.25	3.33	10106072	3400	CONN LINK 1864 SS	10106077
SS1864 SS-4.5IN	10144793	114.3	4.50	4.00	10106073			
SS1864 SS-6IN	10144794	152.4	6.00	4.40	10106074			
SS1864 SS-7.5IN	10144795	190.5	7.50	4.80	10106075			

Standard length: 3.048 m – 10 feet (160 links). Min. backflex radius 305 mm.

Straight Run ¾" Pitch Plastic Top Plate

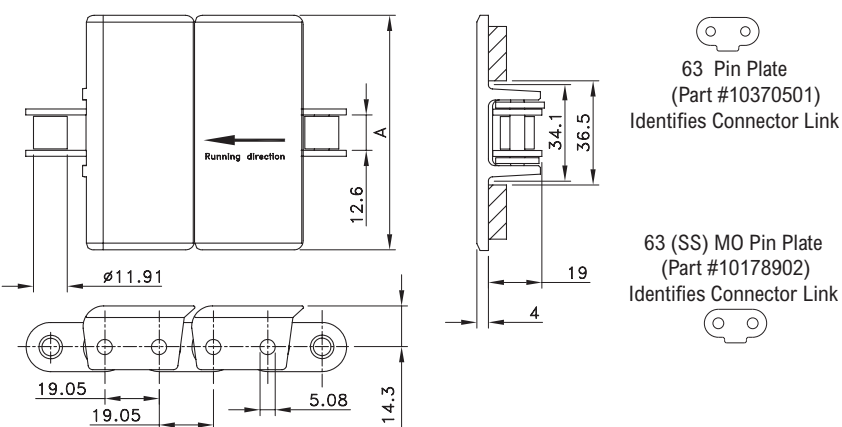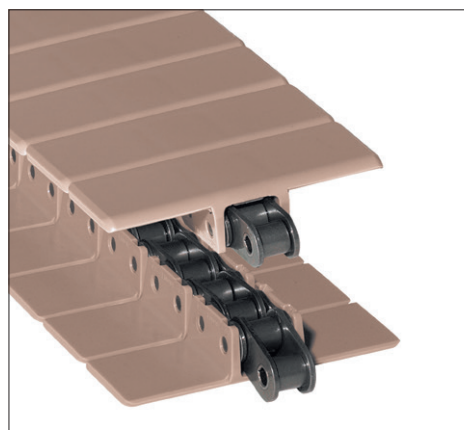

Chain Type	Code Number	Plate Width		Weight	Loose Top Plate	Working Load (max.)	Connection Link	
		A						
		mm	inch	kg/m	Code Number	N (21°C)	Type	Code Number
LF-Acetal Top Plate/Steel Base Chain								
LF963 S-3.25IN	10177766	82.5	3.25	2.10	10069778	2700	CL 63_BTL SP	10370501
LF963 S-4.5IN	10177768	114.3	4.50	2.23	10069785			
LF963 S-6IN	10177770	152.4	6.00	2.53	10069792			
LF963 S-7.5IN	10177771	190.5	7.50	2.68	10069798			
LF-Acetal Top Plate/Stainless Steel Base Chain								
LF963 SS-3.25IN	10177772	82.5	3.25	2.10	10069778	1900	CL 63 SS_KRV UKS BTL SP	10137637
LF963 SS-4.5IN	10177773	114.3	4.50	2.23	10069785			
LF963 SS-6IN	10177774	152.4	6.00	2.53	10069792			
LF963 SS-7.5IN	10177775	190.5	7.50	2.68	10069798			

Standard length: 3.048 m – 10 feet (160 links). Min. backflex radius 153 mm.