


Sideflex 3/4" Pitch Tab Steel Top Plate





63 Pin Plate  
(Part #10370501)  
Identifies Connector Link

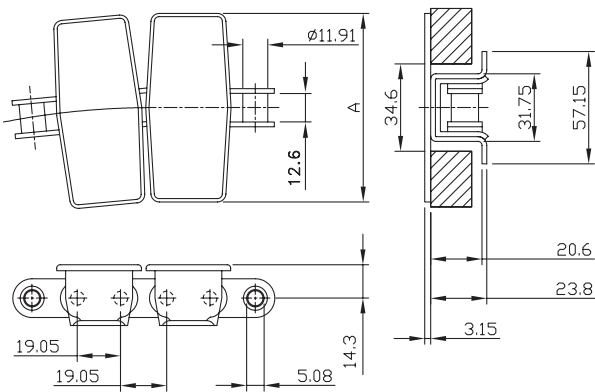

63 (SS) MO Pin Plate  
(Part #10137637)  
Identifies Connector Link



P. 122

| Chain Type                                           | Code Number | Plate Width |      | Weight | Loose Top Plate | Working Load (max.) | Sideflex Radius (min) | Connection Link         |             |
|------------------------------------------------------|-------------|-------------|------|--------|-----------------|---------------------|-----------------------|-------------------------|-------------|
|                                                      |             | A           |      |        |                 |                     |                       | Type                    | Code Number |
|                                                      |             | mm          | inch | kg/m   | Code Number     | N (21°C)            | mm                    |                         |             |
| Steel Top Plate/Steel Base Chain                     |             |             |      |        |                 |                     |                       |                         |             |
| S1874TAB S-3.25IN                                    | 10084603    | 82.5        | 3.25 | 4.20   | 10069632        | 4500                | 381                   | CL 63_ BTL SP           | 10370501    |
| S1874TAB S-4.5IN                                     | 10084604    | 114.3       | 4.50 | 4.80   | 10069634        |                     | 381                   |                         |             |
| S1874TAB S-6IN                                       | 10084605    | 152.4       | 6.00 | 5.70   | 10069638        |                     | 457                   |                         |             |
| S1874TAB S-7.5IN                                     | 10084606    | 190.5       | 7.50 | 6.40   | 10069635        |                     | 610                   |                         |             |
| Stainless Steel Top Plate/Stainless Steel Base Chain |             |             |      |        |                 |                     |                       |                         |             |
| SS1874TAB SS-3.25IN                                  | 10084609    | 82.5        | 3.25 | 4.20   | 10069636        | 3400                | 381                   | CL 63 SS_KRV UKS BTL SP | 10137637    |
| SS1874TAB SS-4.5IN                                   | 10084610    | 114.3       | 4.50 | 4.80   | 10069637        |                     | 381                   |                         |             |
| SS1874TAB SS-6IN                                     | 10084611    | 152.4       | 6.00 | 5.70   | 10069640        |                     | 457                   |                         |             |
| SS1874TAB SS-7.5IN                                   | 10084612    | 190.5       | 7.50 | 6.40   | 10069639        |                     | 610                   |                         |             |

Standard length: 3.048 m – 10 feet (160 links).  
Min. backflex radius 254 mm.