




## Straight Run Double Hinge Max-Line

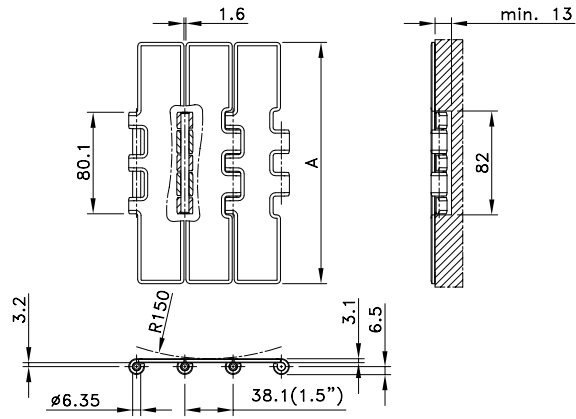

| Chain Type   | Code Number | Plate Width |      | Weight | Surface Flatness (max.) | Polished Hinge Eyes | Working Load (max.) |
|--------------|-------------|-------------|------|--------|-------------------------|---------------------|---------------------|
|              |             | A           |      |        |                         |                     |                     |
|              |             | mm          | inch | mm     | N                       |                     |                     |
| 66-Series    |             |             |      |        |                         |                     |                     |
| 66S77M       | 10375158    | 190.5       | 7.50 | 5.64   | 0.60                    | no                  | 8900                |
| Opti-Plus    |             |             |      |        |                         |                     |                     |
| SSC802-7.5IN | 10068061    | 190.5       | 7.50 | 5.64   | 0.60                    | no                  | 8900                |

Standard length: 3.048 m - 10 feet (80 links).

## Straight Run Heavy Duty Max-Line

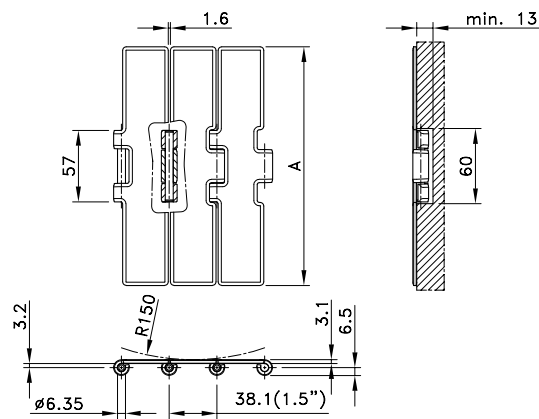

| Chain Type | Code Number | Plate Width |      | Weight | Surface Flatness (max.) | Polished Hinge Eyes | Working Load (max.) |
|------------|-------------|-------------|------|--------|-------------------------|---------------------|---------------------|
|            |             | mm          | inch | kg/m   | mm                      |                     | N                   |
| 60-Series  |             |             |      |        |                         |                     |                     |
| 60S75M     | 10375097    | 190.5       | 7.50 | 5.10   | 0.60                    | no                  | 7000                |
| 66-Series  |             |             |      |        |                         |                     |                     |
| 66S75M     | 10375157    | 190.5       | 7.50 | 5.10   | 0.60                    | no                  | 7000                |

Standard length: 3.048 m - 10 feet (80 links).

NOTE: 60 S 75 M is recommended for medium duty applications, 66 S 75 M is recommended for heavy duty applications.