
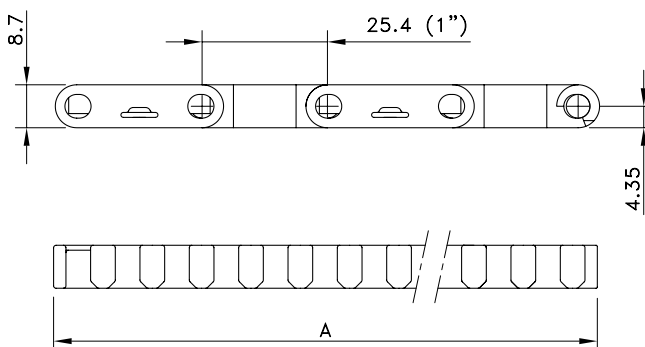


Flush Grid 1000

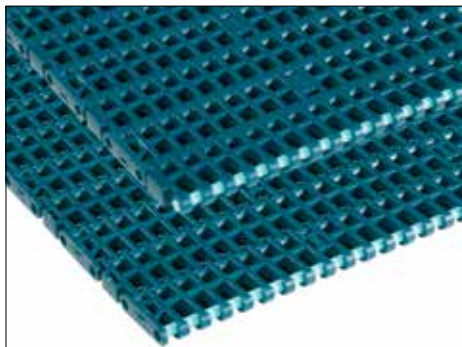

Assembly	Belt Type	Code Number*	Temperature range °C		Working Load (max.) N/m (21°C)	Weight kg/m²	Backflex Radius (min.) mm
			Dry	Wet			

XLG-Acetal with Polypropylene Pins (84 has PBT pins)

Standard	FG 1000 XLG	817.40.xx	-40 to +82	-40 to +66	22000	5.40	25
Double Positrack	FGDP 1000 XLG	874.43.xx					
Positrack 1 side, freeflow 1 side	FFGP 1000 XLG 1xP	874.08.xx					
Positrack 2 sides, freeflow 1 side	FFGP 1000 XLG 2xP	874.07.xx					

PSX Advanced Performance Polymer Alloy with PBT pins

Standard	FG 1000 PSX	874.63.xx	-30 to +80	up to 65	22000	5.40	25
Double Positrack	FGDP 1000 PSX	874.64.xx					
Positrack 1 side, freeflow 1 side	FFGP 1000 PSX 1xP	874.68.xx					
Positrack 2 sides, freeflow 1 side	FFGP 1000 PSX 2xP	874.69.xx					

WHT-Polypropylene with Polypropylene Pins

Standard	WHT 1000 FG	811.90.xx	4 to 104	4 to 104	11000	3.50	25
----------	-------------	-----------	----------	----------	-------	------	----


BHT-Polypropylene with Polypropylene Pins

Standard	BHT 1000 FG	810.08.xx	4 to 104	4 to 104	11000	3.50	25
----------	-------------	-----------	----------	----------	-------	------	----



* In code numbers xx corresponds with the belt width (A), starting with 10 for 85 mm, 11 for 170 mm and so on with 85 mm increments, or optionally 5 mm, up to 6120 mm.

If you need flights, describe the belt by choosing from the required options listed in the 2nd column of the table:

Material	XLG, PSX, WHT or BHT	
Belt type	1000 FG or 1000 FGDP	(Double) Positrack not possible for WLT, BLT, WHT, BHT and SMB
Width (A)	F3IN or F2IN or F1IN	Belts with flights have a minimal width of 130 mm with 10 mm increments
Flights	F3 or F2 or F1	Standard height of 3", 2", 1" or special height in mm
Pitch between flights	T..P	Flights on every .. th row (must correspond to an even number of rows)
Flight side-indent	N.. (in mm)	Minimal 40 mm with 5 mm increments



Positrack



Freeflow 1000-series