



Sideflex with Tabs with Higher Link

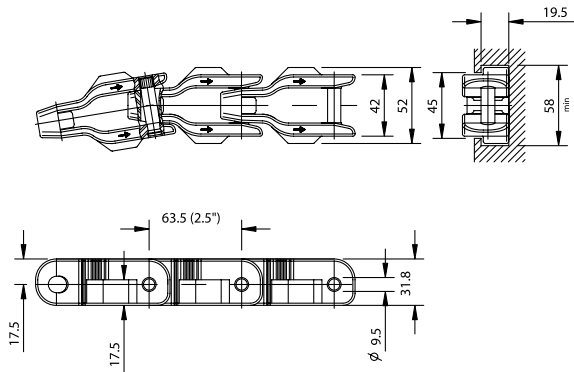

Chain Type	Code Number	Link Width A		Weight kg/m	Working Load (max.) N (21°C)	Backflex Radius (min) mm	Sideflex Radius (min) mm
		mm	inch				
LF-Acetal							
LF631TAB-42MM	10139125	42.0	1.66	1.35	3950	50	457

Standard length: 3.048 m - 10 feet (48 links).
*Ask customer service for minimum order quantity.

Straight Run Reinforced without Tabs

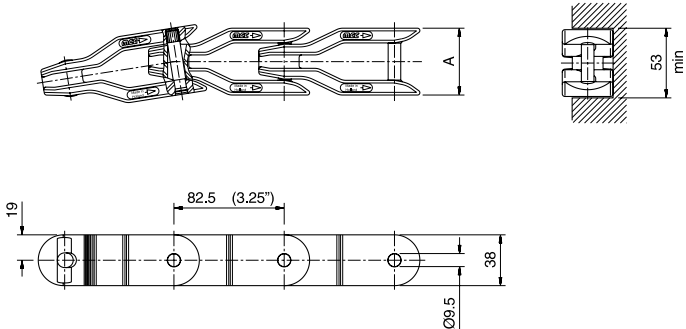

Chain Type	Code Number	Link Width A		Weight	Working Load (max.)	Backflex Radius (min)	Sideflex Radius (min)
		mm	inch				
LF-Acetal							
LF1400-50MM	10139124	50.0	1.97	1.70	6500	50	660

Standard length: 3.053 m - 10 feet (37 links).