



Straight Run ½" Pitch Plastic Top Plate

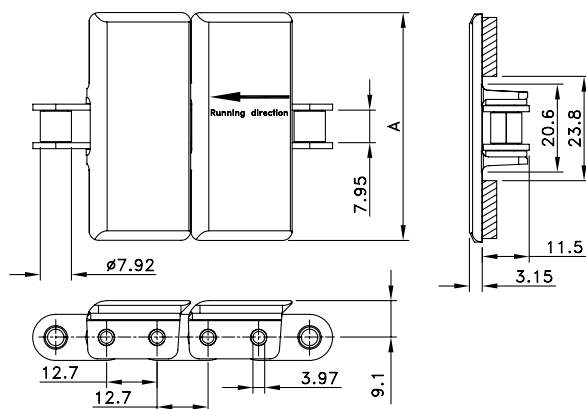

Chain Type	Code Number	Plate Width A		Weight	Working Load (max.)
		mm	inch	kg/m	N (21°C)
LF-Acetal Top Plate/Steel Base Chain					
LF843-1.38IN	10373764	34.9	1.38	0.83	2700
LF843-1.44IN	10373765	36.5	1.44	0.84	
LF843-2IN	10373766	50.8	2.00	0.89	
LF843-3.25IN	10373767	82.5	3.25	1.03	
LF-Acetal Top Plate/Stainless Steel Base Chain					
LF843 SS-1.375IN	10177709	34.9	1.38	0.83	1900
LF843 SS-1.438IN	10177710	36.5	1.44	0.84	
LF843 SS-2IN	10177711	50.8	2.00	0.89	
LF843 SS-3.25IN	10177712	82.5	3.25	1.03	

Standard length: 3.048 m – 10 feet (240 links).
Min. backflex radius 153 mm.

Sideflex ½" Pitch Tab Plastic Top Plate

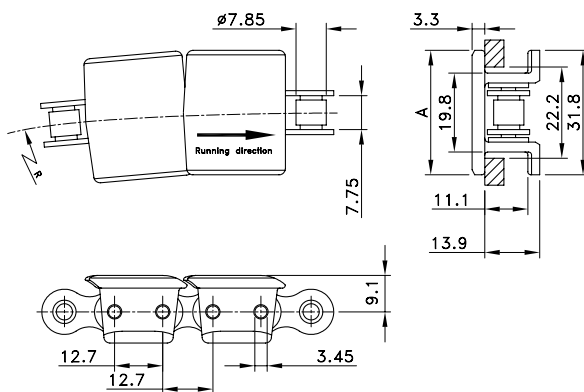

1843 MO Pin Plate
(Part #10084585)
Identifies Connector Link



Upon request

Chain Type	Code Number	Plate Width A		Weight	Loose Top Plate	Working Load (max.)	Sideflex Radius (min)	Connection Link	
		mm	inch	kg/m	Code Number	N (21°C)	mm	Type	Code Number
LF-Acetal Top Plate/Steel Base Chain									
LF1843TAB S-1.25IN	10177561	31.8	1.25	0.74	10365405	2700	254	CONN LINK 1843 S	10084585
LF1843TAB S-2IN	10177562	50.8	2.00	0.90	10365406				

Standard length: 3.048 m – 10 feet (240 links).
Min. backflex radius 102 mm.