

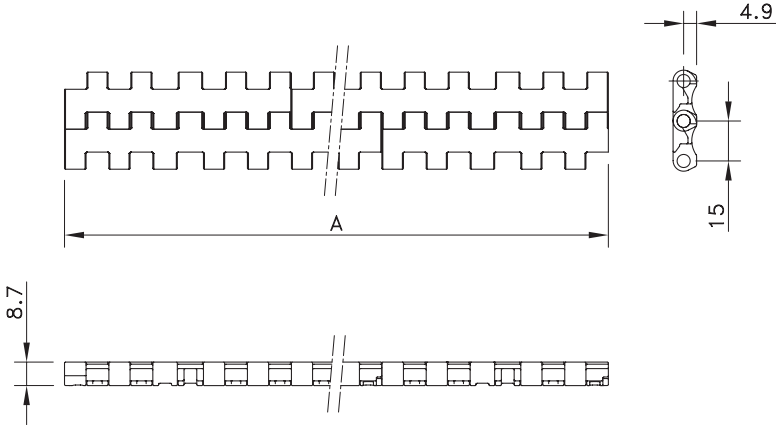
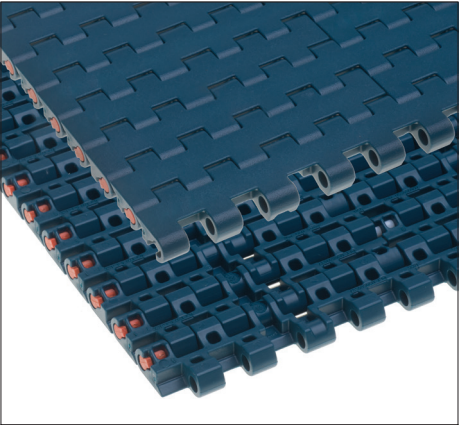


FlatTop 1505 Metric Sizes

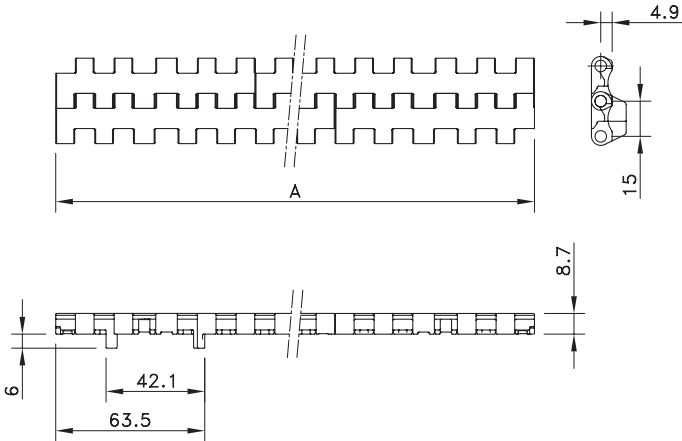

Assembly	Belt Type	Code Number*	Temperature range °C		Working Load (max.)	Weight	Backflex Radius (min.)
			Dry	Wet	N/m (21°C)	kg/m²	mm
XLG-Acetal with PBT Pins							
Standard	XLG1505FT	873.44.xx	-40 to +80	-40 to +65	13200	6.35	25
Double Positrack	XLG1505FT DP	873.54.xx					
PSX Advanced Performance Polymer Alloy with PBT pins							
Standard	PSX1505FT	873.77.xx	4 to 104	4 to 104	13200	4.49	25
Double Positrack	PSX1505FT DP	873.76.xx					
Dry-PT - PBT Pins							
Standard	DRRY-PT1505FT	I1505DRYPTFTxx	4 to 104	4 to 104	13200	4.49	25
Double Positrack	DRY-PT1505FT DP	I1505DRYPTFTDPKxx					
FRPLUS-High performance flame retardant polymer - Acetal Pins							
Standard	FRPLUS1505FT	I1506FRPLUSKxx	-18 to +82	-18 to +60	7300	6.99	25
Double Positrack	FRPLUS1505FT DP	I1506FRPLUSFTDPKxx					

* In code numbers xx corresponds with the belt width (A), starting with 11 for 170 mm, 12 for 255 mm and so on in steps of 85 mm, up to 6120 mm; wider belts upon request. See page 208 for all code numbers. Cut to width options are possible.

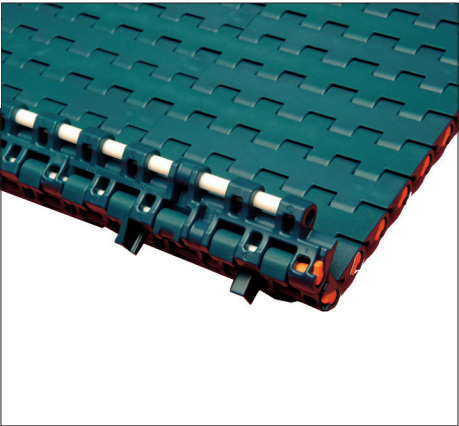

Positrack 1505 Metric