
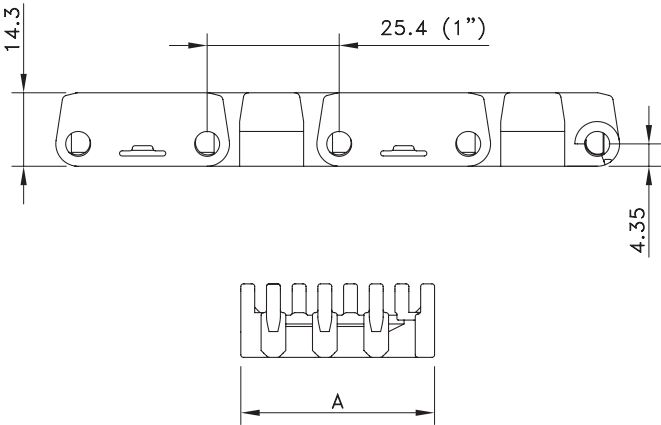




Raised Rib 1000 Narrow

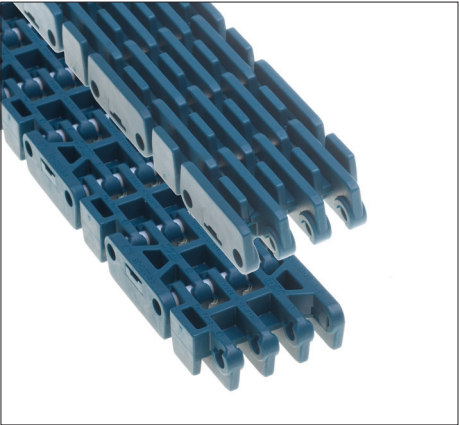

Assembly	Belt Type	Code A Number	Width A	Temperature range °C		Working Load (max.)	Weight	Backflex Radius (min.)
			mm	Dry	Wet	N/m (21°C)	kg/m	mm
XLG-Acetal with PBT Pins								
Standard	XLG1000RR-28MM_MTW	10147974	28	-30 to +80	up to 65	400	0.31	50
	XLG1000RR-38MM_MTW	10147972	38	-30 to +80	up to 65	400	0.39	
	XLG1000RR-48MM_MTW	10147973	48	-30 to +80	up to 65	600	0.48	
	XLG1000RR-58MM_MTW	10352104	58	-30 to +80	up to 65	800	0.58	

Standard length: 6.096 m - 20 feet.

Raised Rib 1000 Railtrack Narrow

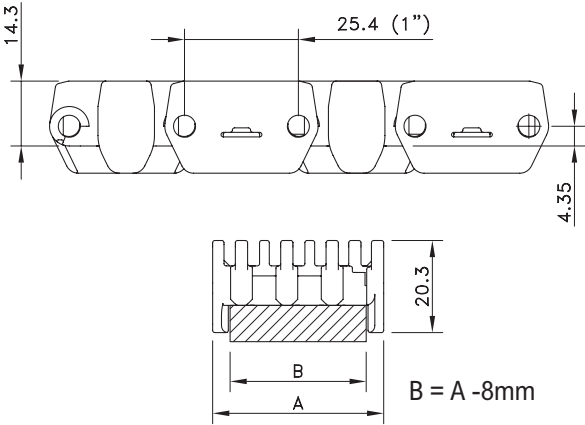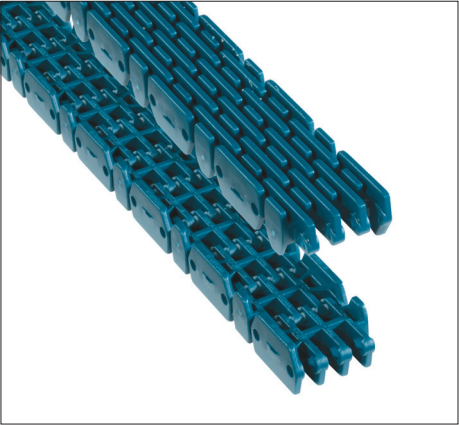

Assembly	Belt Type	Code Number	Width A	Temperature range °C		Working Load (max.)	Weight	Backflex Radius (min.)
			mm	Dry	Wet	N/m (21°C)	kg/m²	mm
XLG-Acetal with PBT Pins								
Standard	XLG1000RRR-28MM_MTW	10147971	28	-30 to +80	up to 65	200	0.33	50
	XLG1000RRR-38MM_MTW	10147968	38	-30 to +80	up to 65	400	0.43	
	XLG1000RRR-48MM_MTW	10147969	48	-30 to +80	up to 65	600	0.53	
	XLG1000RRR-58MM_MTW	10147970	58	-30 to +80	up to 65	800	0.62	

Standard length: 6.096 m - 20 feet.