

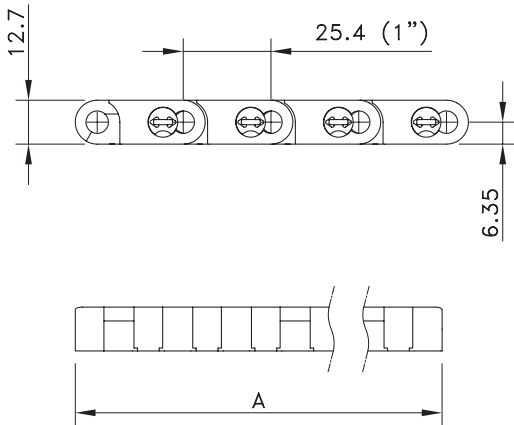


FlatTop® 1005


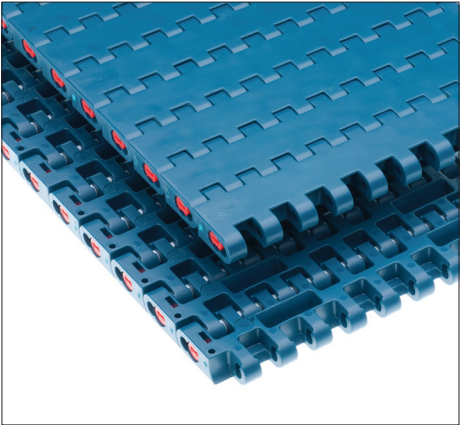


Assembly	Belt Type	Code Num-ber*	Temperature range °C		Working Load (max.)	Weight	Backflex Radius (min.)
			Dry	Wet	N/m (21°C)	kg/m²	mm
XLG-Acetal with PBT Pins							
Standard	XLG1005FT	877.00.xx	−40 to +80	up to 65	35000	13.50	25
Double positrack	XLG1005FT PT-1DP	877.01.xx					
Double positrack, freeflow	XLG1005FFT PT-1DP	877.02.xx					
GLA-Acetal with PBT Pins							
Standard	GLA1005FT	877.25.xx	−40 to +80	up to 65	35000	13.50	25
Double positrack	GLA1005FT PT-1DP	877.26.xx					
BWV-Polyamide Composite with PBT Pins							
Standard	BWV1005FT	877.27.xx	−40 to +80	not recommended	35000	13.50	25
Double positrack	BWV1005FT PT-1DP	877.28.xx					


* In code numbers xx corresponds with the belt width (A), starting with 10 for 85 mm, 11 for 170 mm and so on in steps of 85 mm up to 6120 mm. Other sizes upon request. See page 208 for all code numbers.




Flat Top 1005 heavy duty belt with integrated FreeFlow

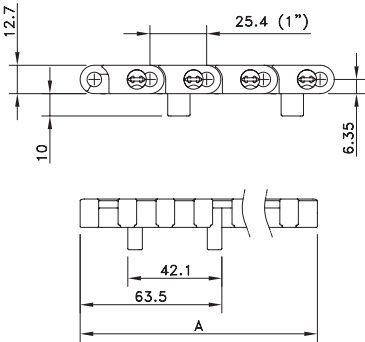

Flat Top 1005 heavy duty belt with Positrac

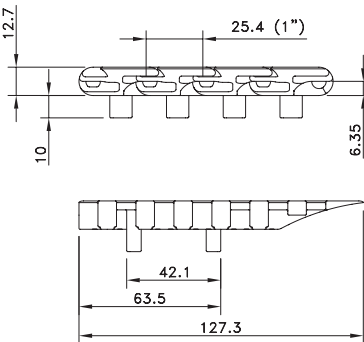

The double Positrac lugs are positioned on one side of the belt for precise transfer possibilities.

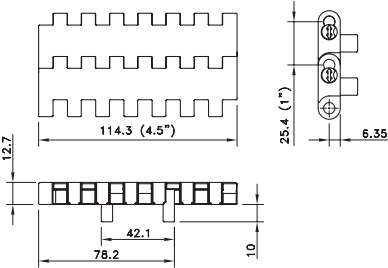

1005 Belt mould to width with double Positrac