
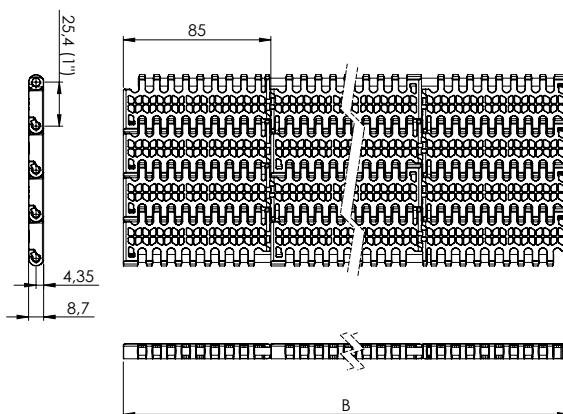





1104 FlushTop

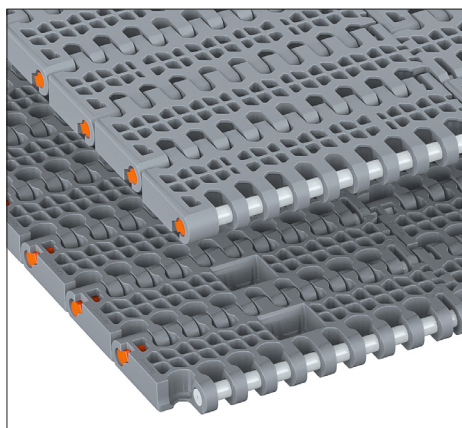

Assembly	Belt Type	Code Number*	Temperature range °C		Working Load (max.)	Weight	Backflex Radius (min.)
			Dry	Wet			
Standard	PSX1104FLT-xxxMM		-40 to +80	65	22000	6.7	25
Double Positrack	PSX1104FLT-xxxMM_PT-1DP						
Molded To Width	PSX1104FLT-84MM_MTW_PT	10949475					

* In code numbers xx corresponds with the belt width (A), starting with 85 mm increments up to 6120 mm.

Split Sprockets and Idlers Moulded



Sprocket Type	Code Number	Number of Teeth	Bore	Pitch Diameter	Outside Diameter	Hub Width		
			B	E	F	A		
		mm/inch	mm	mm	mm			
Sprockets 1104								
NSH1100-16T_30MM_1KW_PA_SRF	10977195	16	30	130.2	132.1	30		
NSH1100-16T_30MM_1KW_PA_SRL	10977246	16	30					
NSH1100-16T_40MM_1KW_PA_SRF	10977247	16	40					
NSH1100-16T_40MM_1KW_PA_SRL	10977248	16	40					
NSH1100-18T_30MM_1KW_PA_SRF	10977249	18	30	146.3	148.5		30	
NSH1100-18T_30MM_1KW_PA_SRL	10977251	18	30					
NSH1100-18T_40MM_1KW_PA_SRL	10977253	18	40					
NSH1100-18T_40MM_1KW_PA_SRF	10977252	18	40					
NSH1100-20T_30MM_1KW_PA_SRF	10977254	20	30	162.4	164.8			30
NSH1100-20T_30MM_1KW_PA_SRL	10977255	20	30					
NSH1100-20T_40MM_1KW_PA_SRF	10977256	20	40					
NSH1100-20T_40MM_1KW_PA_SRL	10977257	20	40					
NH1100-12T_30MM_1KW_PA	10977258	12	30	98.1	99.2	20		
NH1100-12T_40MM_1KW_PA	10977259	12	40					

SRF = Shaft-ready fixed
SRL = Shaft-ready large