


## Part. S0840




### Chain - guide profile

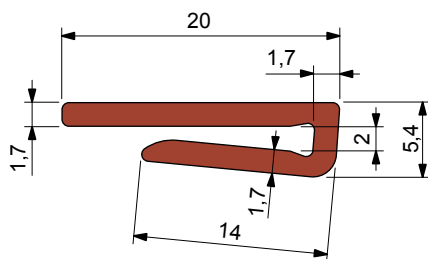


| Material       | Packaging | Code     |
|----------------|-----------|----------|
| UHMWPE         | metres    |          |
| ULF™ brown red | 40        | UL642693 |

- Applicable to 2 mm thick sheet metal.
- Standard packaging: coil.

## Part. S0244




### Chain - guide profile



| Material | L x H  | Packaging | Code  |
|----------|--------|-----------|-------|
| UHMWPE   | mm     | metres    |       |
| Green    | 40 x 3 | 60        | 63661 |


- Standard packaging: coil.
- Accessories:




Chain inlet guide shoe side Part. S0551.

- **Material:** Polyethylene UHMWPE with molecular density 5.600.000 g/mol.  
Characteristics: new material Polyethylene ULF™ brown red (UHMWPE): reduced friction coefficient, higher wear resistance.
- **Linear expansion coefficient:**  $2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$   
Calculation of thermal expansion see Technical information.
- **Operating temperature Green Black:**  
In air (- 40 to + 80 °C).  
In hot water (+ 70 °C).
- **Operating temperature ULF™ brown red:**  
In air (- 40 to + 45 °C).  
In hot water (+ 45 °C).
- **Polyethylene ULF™ is FDA approved**  
Polyethylene ULF™ complies with the Code of Federal Regulations Title 21, § 177.1520 "Olefin Polymers" of the Food and Drug Administration (FDA) of April 1, 2008.
- **Coefficient of friction between chain POM and wearstrip ULF™:** 0,08.  
Note: for calculation of chain pull refer to Technical Support.
- **Position of guides.** See Technical information.

- ZeroGap™ chains series 1775

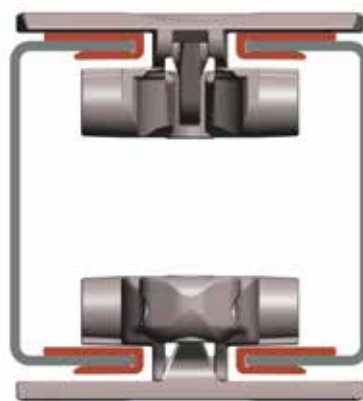


Chain width 82,5 mm (K 325) / Pitch 85 mm

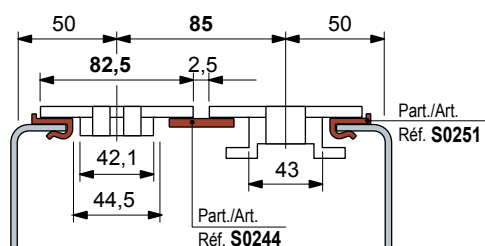

- **Low backline pressure chains series SLBP 882 TAB - SLBP 821**

Chain width 190,5 mm (K 750)

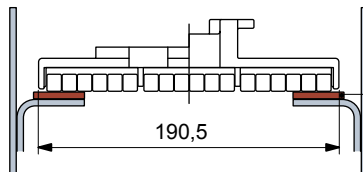

Chain width 95,2 mm (K 375)

