


## Part. S0366



### Chain - guide profile

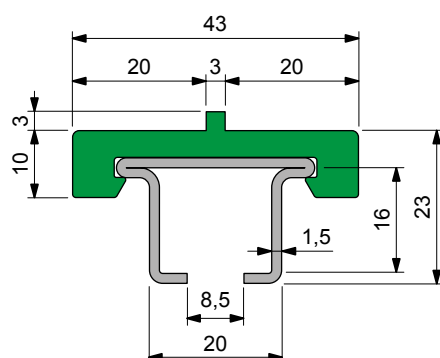


| Metal profile material     | Length metres | Code          | Weight kg/m |
|----------------------------|---------------|---------------|-------------|
| Austenitic stainless steel | 3             | <b>64056M</b> | 1,10        |

- Colour: green.
- Standard packaging: the plastic and metal profiles are supplied assembled.
- Packaging: 12 metres.

## Part. S0367



### Chain - guide profile

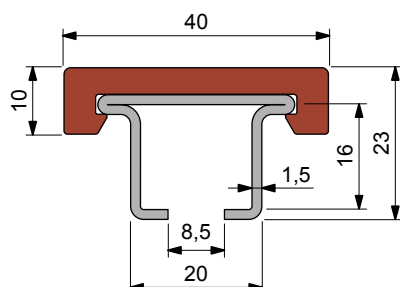


| Metal profile material     | Material UHMWPE | Length metres | Code           | Weight kg/m |
|----------------------------|-----------------|---------------|----------------|-------------|
| Austenitic stainless steel | Green           | 3             | <b>64046M</b>  | 1,10        |
| Austenitic stainless steel | Green           | 6             | <b>69615M</b>  |             |
| Ferritic stainless steel   | Green           | 3             | <b>693272M</b> |             |
| Ferritic stainless steel   | Green           | 6             | <b>693282M</b> |             |

- Standard packaging: the plastic and metal profiles are supplied assembled.
- Packaging: 6 metres.
- Packaging: 3 metres.


- **Material:** Polyethylene UHMWPE with molecular density 5.600.000 g/mol.  
Characteristics: new material Polyethylene ULF™ brown red (UHMWPE): reduced friction coefficient, higher wear resistance.
- **Linear expansion coefficient:**  $2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$   
Calculation of thermal expansion see Technical information.
- **Operating temperature Green Black:**  
In air (- 40 to + 80 °C).  
In hot water (+ 70 °C).
- **Operating temperature ULF™ brown red:**  
In air (- 40 to + 45 °C).  
In hot water (+ 45 °C).
- **Polyethylene ULF™ is FDA approved**  
Polyethylene ULF™ complies with the Code of Federal Regulations Title 21, § 177.1520 "Olefin Polymers" of the Food and Drug Administration (FDA) of April 1, 2008.
- **Coefficient of friction between chain POM and wearstrip ULF™:** 0,08.  
Note: for calculation of chain pull refer to Technical Support.
- **Position of guides.** See Technical information.

### Deflection of Part. S0366 - S0367 - S0368

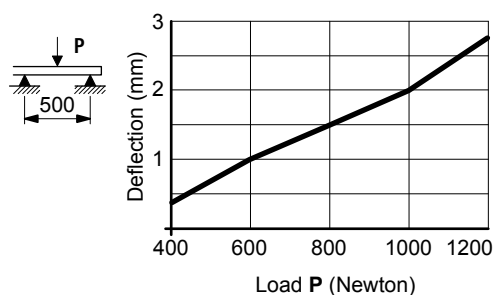


### TableTop® chains series 812 - 815 - 820 - 831 - 881TAB - 8811TAB - 879TAB - 880TAB

Chain width 82,5 mm (K 325) / Pitch 88 mm

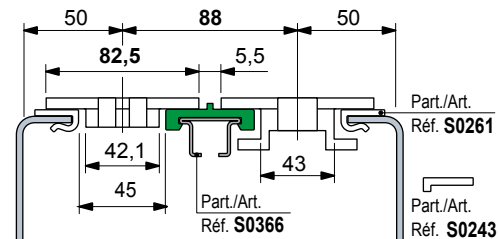

Chain width 82,5 mm (K 325) / Pitch 85 mm

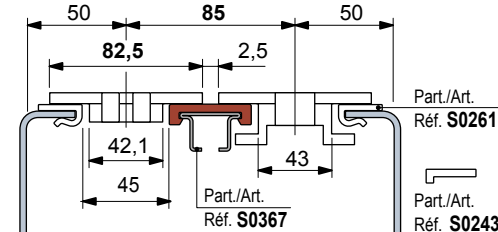

Chain width 82,5 mm (K 325) / Pitch 83,5 mm

