



• Assembly of Part. S0618

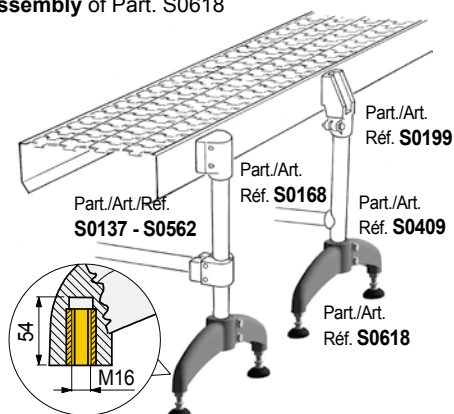


Detail of the insert for the levelers.

• Sliding load



Part. S0618 (P = 8000 N)
Part. S0611 (P = 8000 N)


• Max applicable load



Part. S0618 (P = 9600 N)
Part. S0611 (P = 8000 N)


Tests performed at tightening torque:
3,6 Kgm (Part. S0618), 2,5 Kgm (Part. S0611)

• Types of levelers that can be used



Part./Art./Réf. R0098 - R0133 - R0323


• Assembly of Part. S0611

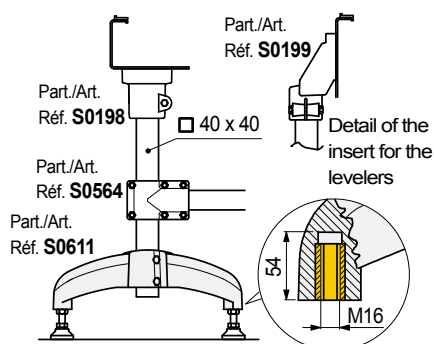


• Part. S0611 available versions

Closed version
Easy to clean

Open versionload

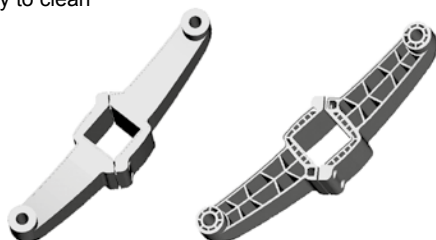

■ Support base (bipod)

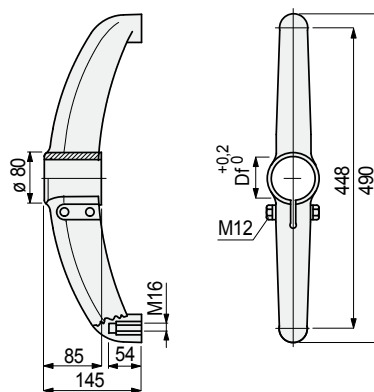

Tube
dimensions
mm

Bore dia.
Df
mm

Code

Bolts in austenitic stainless steel

48,3 (1"½)	48,3	624302
50,8	50,8	624312
60,3 (2")	60,3	624322


- Material: support base in reinforced polyamide PA FV (black), brass threaded bushings.
- Weight: 1,05 Kg.
- Max recommended tightening torque: 3,6 Kgm.
- Packaging: 4 pieces.

Part. S0618



For round tubes

■ Support base (bipod)

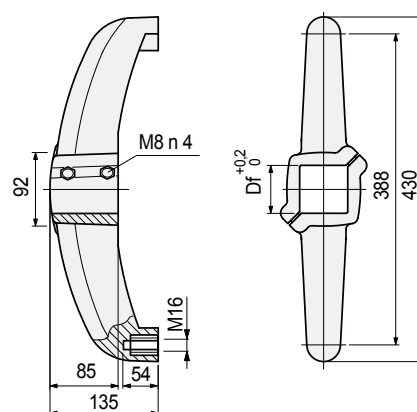

Tube
dimensions
mm

Bore
Df
mm

Code

Open
version

50 x 50	50	616092
---------	----	--------

- Material: support base in reinforced polyamide PA FV (black), bolts in austenitic stainless steel, tightening bushes in nickel plated brass, brass threaded bushings.
- Max recommended tightening torque: 2,5 Kgm.
- Weight: 0,9 Kg.
- Packaging: 4 pieces (8 half bases).

Part. S0611



For square tubes