CONVEYOR ACCESSORIES
SERIES 2130
Polymer conveyor wheel

Application area
This series is universally applicable, e.g. it can be used as side guide roller.

Quiet, light and robust
The material selected is a particularly impact-resistant polymer. The wheel features a double ball race made of steel, which ensures particularly quiet running. The wheel is especially light and offers a very soft startup.



© 01 | 2026 Interroll

Technical data

General technical data	
Platform	1100
Max. load capacity	150 N
Max. conveyor speed	0.3 m/s
Temperature range	0 to +40 °C
Material	
Wheel	Polypropylene, RAL9005 (jet black)
Rubber gasket	Ethylene-propylene-diene monomer (EPDM)/RAL7030 (stone gray)
Rubber gasket hardness	50 Shore A
Bearing version	Uncoated steel balls on zinc-plated steel hub
Anti-static version	No


Load capacities of series 2130

The load capacity table refers to a temperature range of 0 to +40 °C.


Ø of hole [mm]	Fitted rubber tire	Max. dynamic load [N]	Max. static load [N]	Article number
6.5	No	150	150	S-64000376
8.2		150	150	S-64000377
6.5	Yes	50	50	RD-2132
8.2		50	50	RD-2133

Dimensions

Without rubber gasket



With rubber gasket

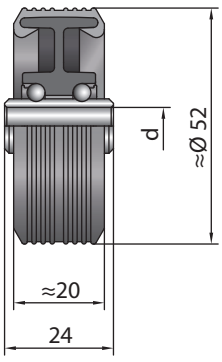

© 01 | 2026 Interroll