


Part. S0617



Bracket with eyebolt

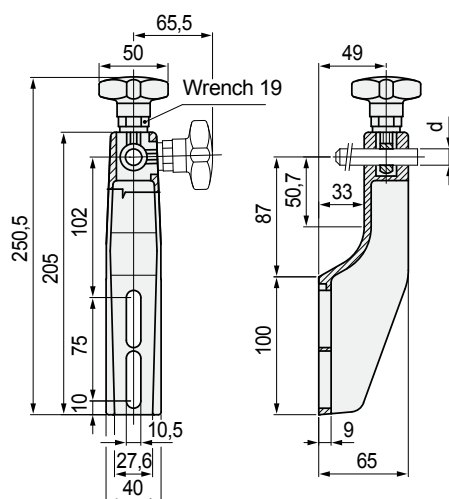


Material	Pin dia. d mm	Code	Weight kg
Reinforced polyamide PA FV (black))	12	613562	0,18

- Material: knob in reinforced polyamide (black), exagonal insert (for 19 mm wrench) in nickel plated brass, eyebolt in austenitic stainless steel.
- Max recommended tightening torque: 4 Kgm.
- Packaging: 12 pieces.

Part. S0140




Bracket with eyebolt

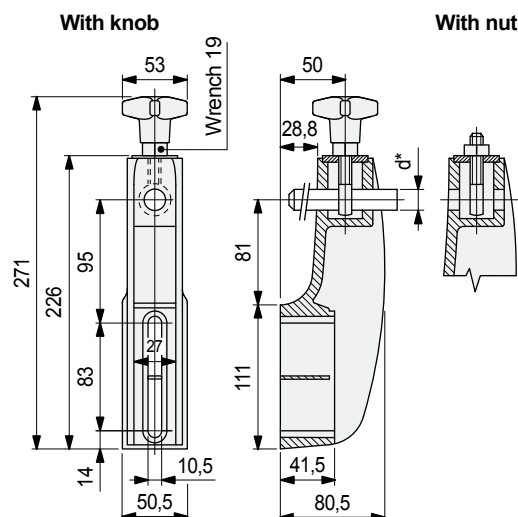

Pin dia. d* mm	Version	Code	Weight kg
14÷16	with knob	66690N	0,47

- * = The bracket can be used with dia. 14 and dia. 16 mm pins.
- Material: bracket and knob in reinforced polyamide (black), exagonal insert (for 19 mm wrench) in nickel plated brass, tightening nut and eyebolt in austenitic stainless steel.
- Max recommended tightening torque: 4 Kgm.
- Packaging: 12 pieces.

Deflection of Part. S0617

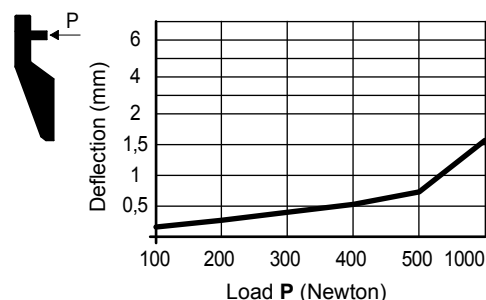


Technical data Part. S0085

- Sliding load resistance: 2000 N (width d = 12)
- Breaking load: 3000 N

Tests performed at tightening torque: 4 Kgm


Accessories

Spacer Part. S0142.
Applicable to
Part. S0617 - S0140.




Assembly of drip tray support

Part. S0226 - S0336.
Part. S0617 - S0140
permit application of drip
tray support.



Deflection of Part. S0140

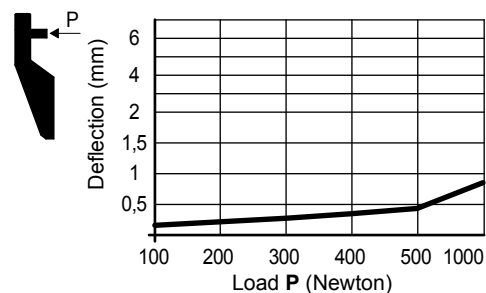

Technical data Part. S0140

- Sliding load resistance: 3000 N (width d = 14-16)
- Breaking load: 12000 N

Tests performed at tightening torque: 4 Kgm